

MXB RODLESS BELT DRIVE ACTUATORS

 **ENDURANCE TECHNOLOGY**™ 

 UNGUIDED

 PROFILED RAIL



LINEAR SOLUTIONS MADE EASY

MXB Rodless Belt Drive Actuators

DESIGNED TO OUTLAST EVERY BELT DRIVE ACTUATOR ON THE MARKET




The MXB belt drive electric actuator is exactly what you would expect from the industry's number one rodless supplier. Designed with our exclusive **ENDURANCE TECHNOLOGY™** features, the MXB delivers superior performance to meet the most demanding applications. Nobody knows rodless like Tolomatic, and the MXB proves it.

- MXB-**U** & MXB-**P**: Low profile to fit your application
- MXB-**P**: High precision bearings feature smooth, low breakaway motion
- MXB-**P**: Durable profiled rail design uses recirculating ball technology to reduce friction and extend actuator life.
- MXB-**P**: High load and bending moment capacities

Choose from our broad line of MX products:

| ELECTRIC | | | |
|---|---|---|---|
| MXB | | MXE | |
| Belt Drive | | Screw Drive | |
|  |  |  |  |
| P Profiled Rail | U Unguided | P Profiled Rail | S Solid Bearing |
| MXB16P | MXB16U | MXE16P | MXE16S |
| MXB25P | MXB25U | MXE25P | MXE25S |
| MXB32P | MXB32U | MXE32P | MXE32S |
| MXB40P | MXB40U | MXE40P | MXE40S |
| MXB50P | MXB50U | MXE50P | MXE50S |
| MXB63P | MXB63U | MXE63P | MXE63S |

| PNEUMATIC | | |
|--|---|---|
| MXP | | |
| Rodless Cylinder | | |
|  |  |  |
| P Profiled Rail | S Solid Bearing | N Internal Bearing |
| MXP16P | MXP16S | MXP16N |
| MXP25P | MXP25S | MXP25N |
| MXP32P | MXP32S | MXP32N |
| MXP40P | MXP40S | MXP40N |
| MXP50P | MXP50S | MXP50N |
| MXP63P | MXP63S | MXP63N |

A Comparison of Tolomatic Belt Drive Actuators

All Tolomatic belt drive actuators feature:

- High linear velocity
- High acceleration rate
- Long stroke lengths
- Excellent repeatability
- High duty cycles
- Low profile

Unique features include:

| MXB-U Electric Belt Drive | MXB-P Electric Belt Drive | B3W Electric Belt Drive | TKB Electric Belt Drive |
|--|--|---|--|
|  |  |  |  |
| <ul style="list-style-type: none"> • Requires external guidance and support | <ul style="list-style-type: none"> • High load and bending moment capacities • High precision bearings feature smooth, low breakaway motion • Durable profiled rail design uses recirculating ball technology to reduce friction and extend actuator life | | <ul style="list-style-type: none"> • Superior rigidity, high moment loads • Straightness and flatness within 0.0002 inches per inch of stroke • Wide stable platform for XY applications • Lowest carrier deflection of any Tolomatic actuator |
| <i>www.tolomatic.com for complete information, search by literature number:</i> | | | |
| #8500-4000 | #8500-4000 | #3600-4148 | #3600-4609 |

CONTENTS

| | |
|-------------------------------------|----|
| MXB Belt Drive Actuator.. | 2 |
| MX Products..... | 2 |
| Belt Drive Comparison..... | 3 |
| Belt Drive Advantages | 4 |
| Belt Construction | 4 |
| Applications | 5 |
| MXB-U Features..... | 6 |
| MXB-P Features | 8 |
| Specifications | 10 |
| Acceleration | 11 |
| Mounting Plate Requirements | 11 |
| Moment & Load Capacity..... | 12 |
| Load Deflection | 13 |
| MXB-U Actuator Dimensions..... | 14 |
| MXB-U Option Dimensions..... | 14 |
| MXB-P Actuator Dimensions..... | 15 |
| MXB-P Option Dimensions..... | 16 |
| Direct Drive Motor Mounting | 17 |
| Reduction Drive Motor Mounting..... | 17 |
| Switches | 18 |
| Application Data Worksheet | 20 |
| Selection Guidelines | 21 |
| Service Parts Ordering..... | 22 |
| Ordering..... | 23 |
| Other Tolomatic Products..... | 24 |



**World class performance,
five days built-to-order and
legendary customer service ...**

***what you expect from the
rodless leader ...***



FREE downloads at www.tolomatic.com:



• **Sizing & Selection Software**

• **3D Solid Models**



MXB Rodless Belt Drive Actuators

ADVANTAGES OF BELT SOLUTIONS

The use of synchronous belts, often referred to as timing belts, have become a standard in the automated motion industry as an alternate to screw drive mechanisms for producing linear motion. MXB-**U** and MXB-**P** belt drive actuators are an excellent solution for applications that require:

- High linear velocities
- High acceleration rates
- Long stroke lengths
- Excellent repeatability
- High duty cycles


Tolomatic rodless belt drive actuators can achieve linear acceleration up to 1200 in/sec², MXB-U velocity of up to 200 in/sec (5 m/sec) and MXB-P velocity of up to 150 in/sec (3.8 m/sec).

BELT CONSTRUCTION

Tolomatic's standard belt is a polyurethane material reinforced with steel tension members to produce high carrier thrusts without belt stretch.

Tolomatic uses an HTD synchronous belt that features a curvilinear tooth profile. The HTD tooth profile distributes tooth load more evenly and provides greater tooth shear strength, allowing for higher thrust loading.

The deep teeth of the HTD profile are cogging-resistant, preventing potentially damaging positioning errors.

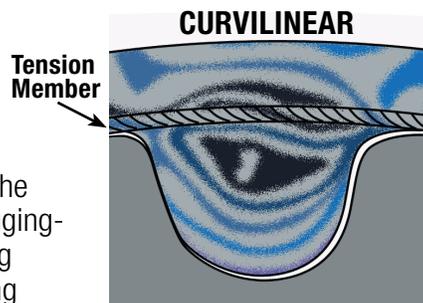

Tolomatic's belt tooth profile distributes thrust force evenly

BELT DRIVE APPLICATIONS


Tolomatic MXB-**U** and MXB-**P** rodless belt drive actuators are:

- Easy to size and order
- Quick to install and maintain
- Simple to integrate and control

Both MXB-U and MXB-P are available in multiple frame sizes. The MXB-P belt drive actuator integrates the advantages of a linear belt solution with a load support and guidance system. This combination allows you to install a pre-assembled and compact solution, often without the need of external guide rails or load support systems. MXB-P offers options such as dual carriers for twice the load and moment capacity.


U APPLICATION: Workcenter Positioning

- +Positioning
- +Assembly
- +Milling

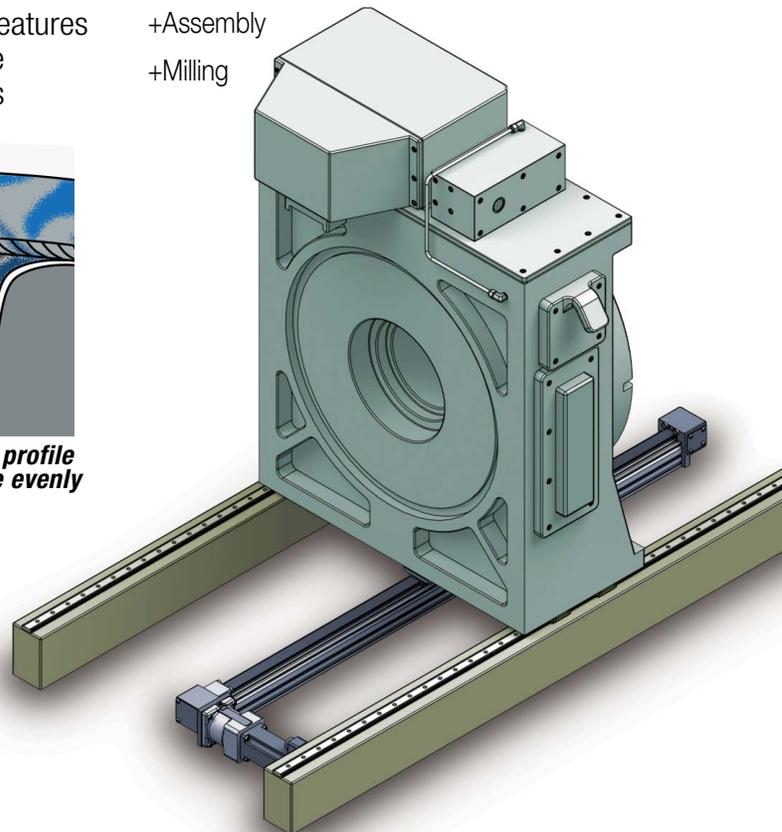


MXB Rodless Belt Drive Actuators

P APPLICATION: High Speed Flying Cut Off

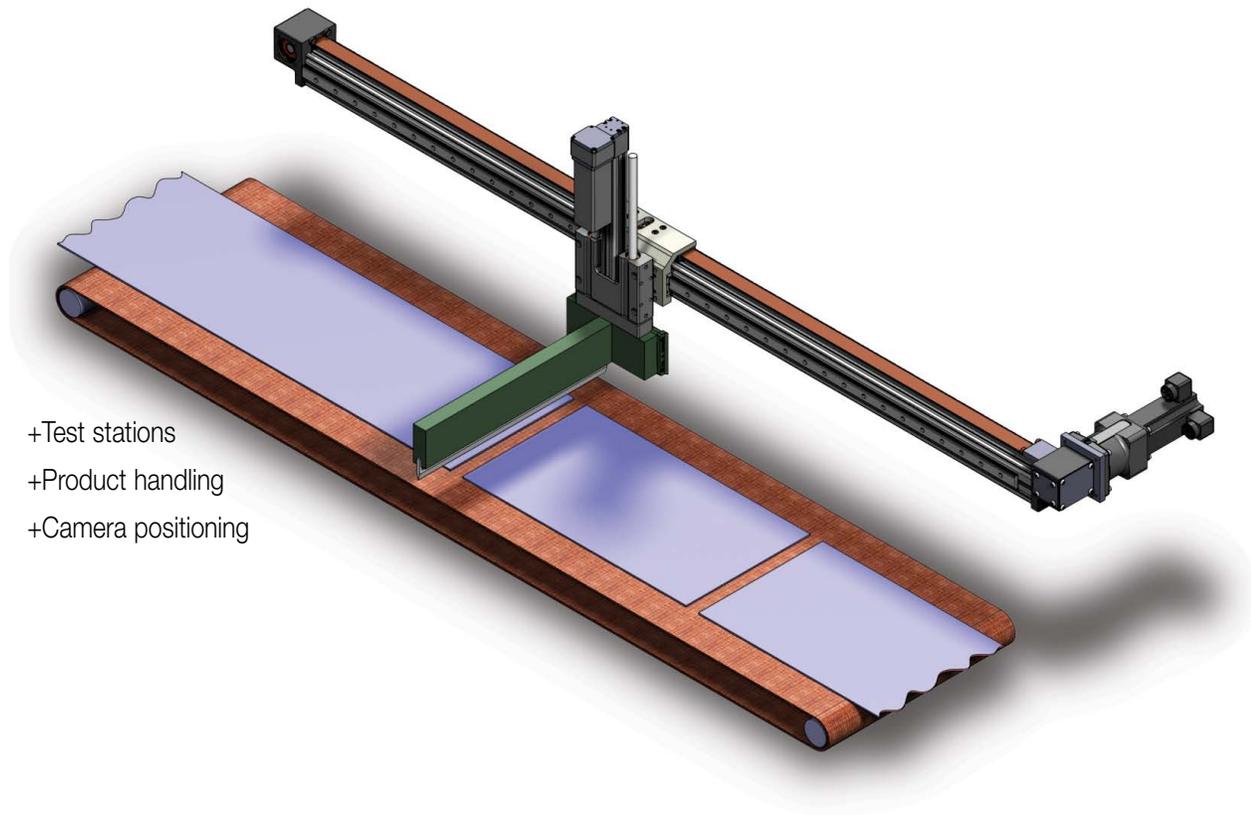

- +Test stations
- +Product handling
- +Camera positioning

P APPLICATION: X-Y Multi-Axis

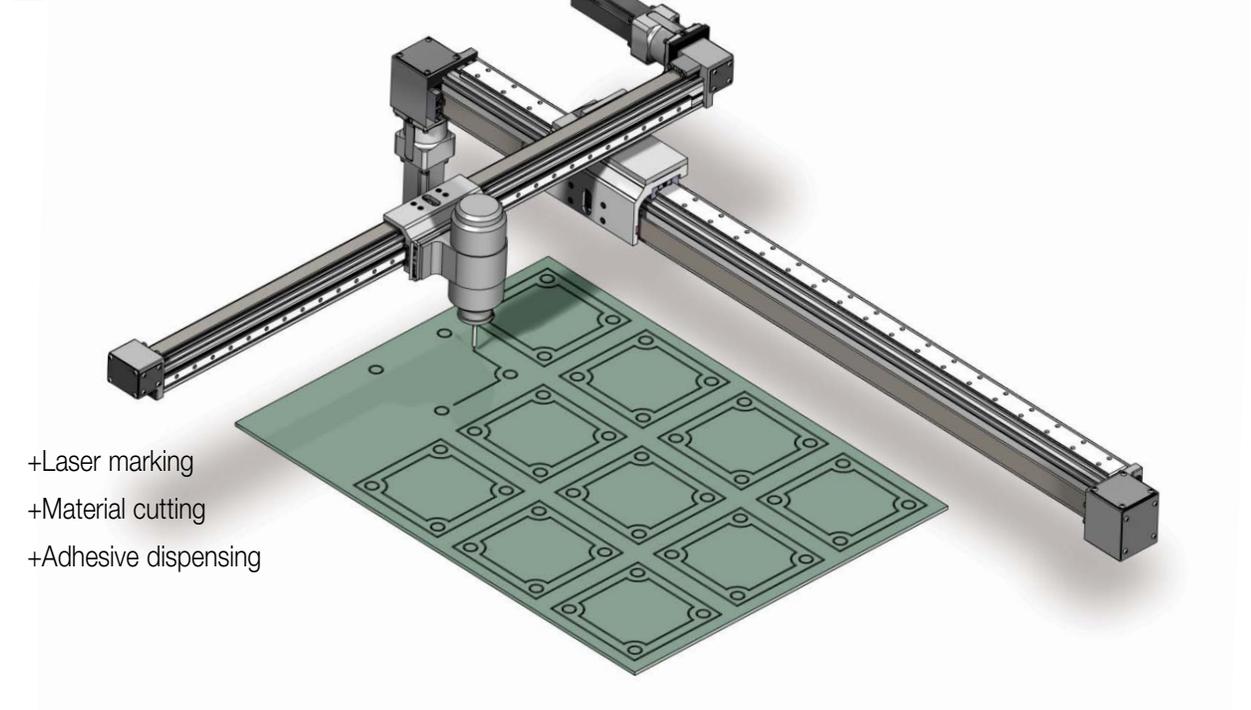


- +Laser marking
- +Material cutting
- +Adhesive dispensing

MXB-U UNGUIDED BELT DRIVE ACTUATOR

ENDURANCE TECHNOLOGYSM

Endurance TechnologySM features are designed for maximum durability to provide extended service life.

The MXB-U rodless style actuator is a pre-assembled compact linear belt solution for use in applications with existing guides & supports. This economical actuator features speeds up to 200 in/sec and thrusts up to 418 lbf. Built-to-order in stroke lengths up to 200 inches.

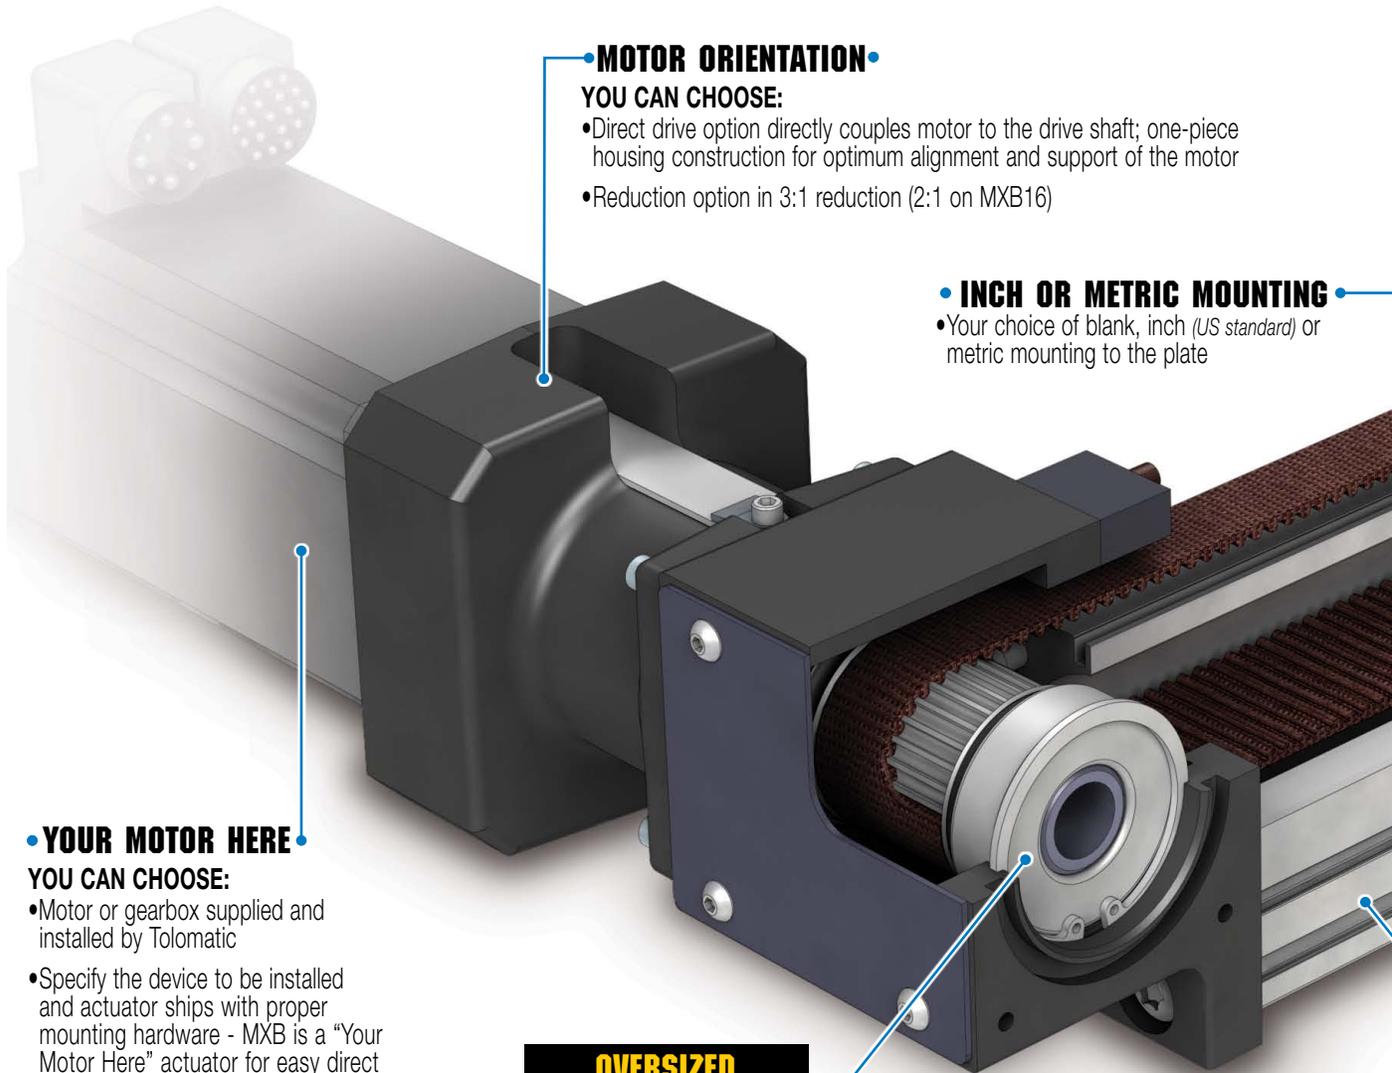

• MOTOR ORIENTATION •

YOU CAN CHOOSE:

- Direct drive option directly couples motor to the drive shaft; one-piece housing construction for optimum alignment and support of the motor
- Reduction option in 3:1 reduction (2:1 on MXB16)

• INCH OR METRIC MOUNTING •

- Your choice of blank, inch (*US standard*) or metric mounting to the plate

• YOUR MOTOR HERE •


YOU CAN CHOOSE:

- Motor or gearbox supplied and installed by Tolomatic
- Specify the device to be installed and actuator ships with proper mounting hardware - MXB is a "Your Motor Here" actuator for easy direct drive motor installation. Check our website (www.tolomatic.com/ymh) for complete information
- Specify and ship your device to Tolomatic for factory installation

• OVERSIZED PULLEY BEARINGS •

- Drive shaft assembly incorporates oversized shielded/sealed ball bearings for long life and high speeds



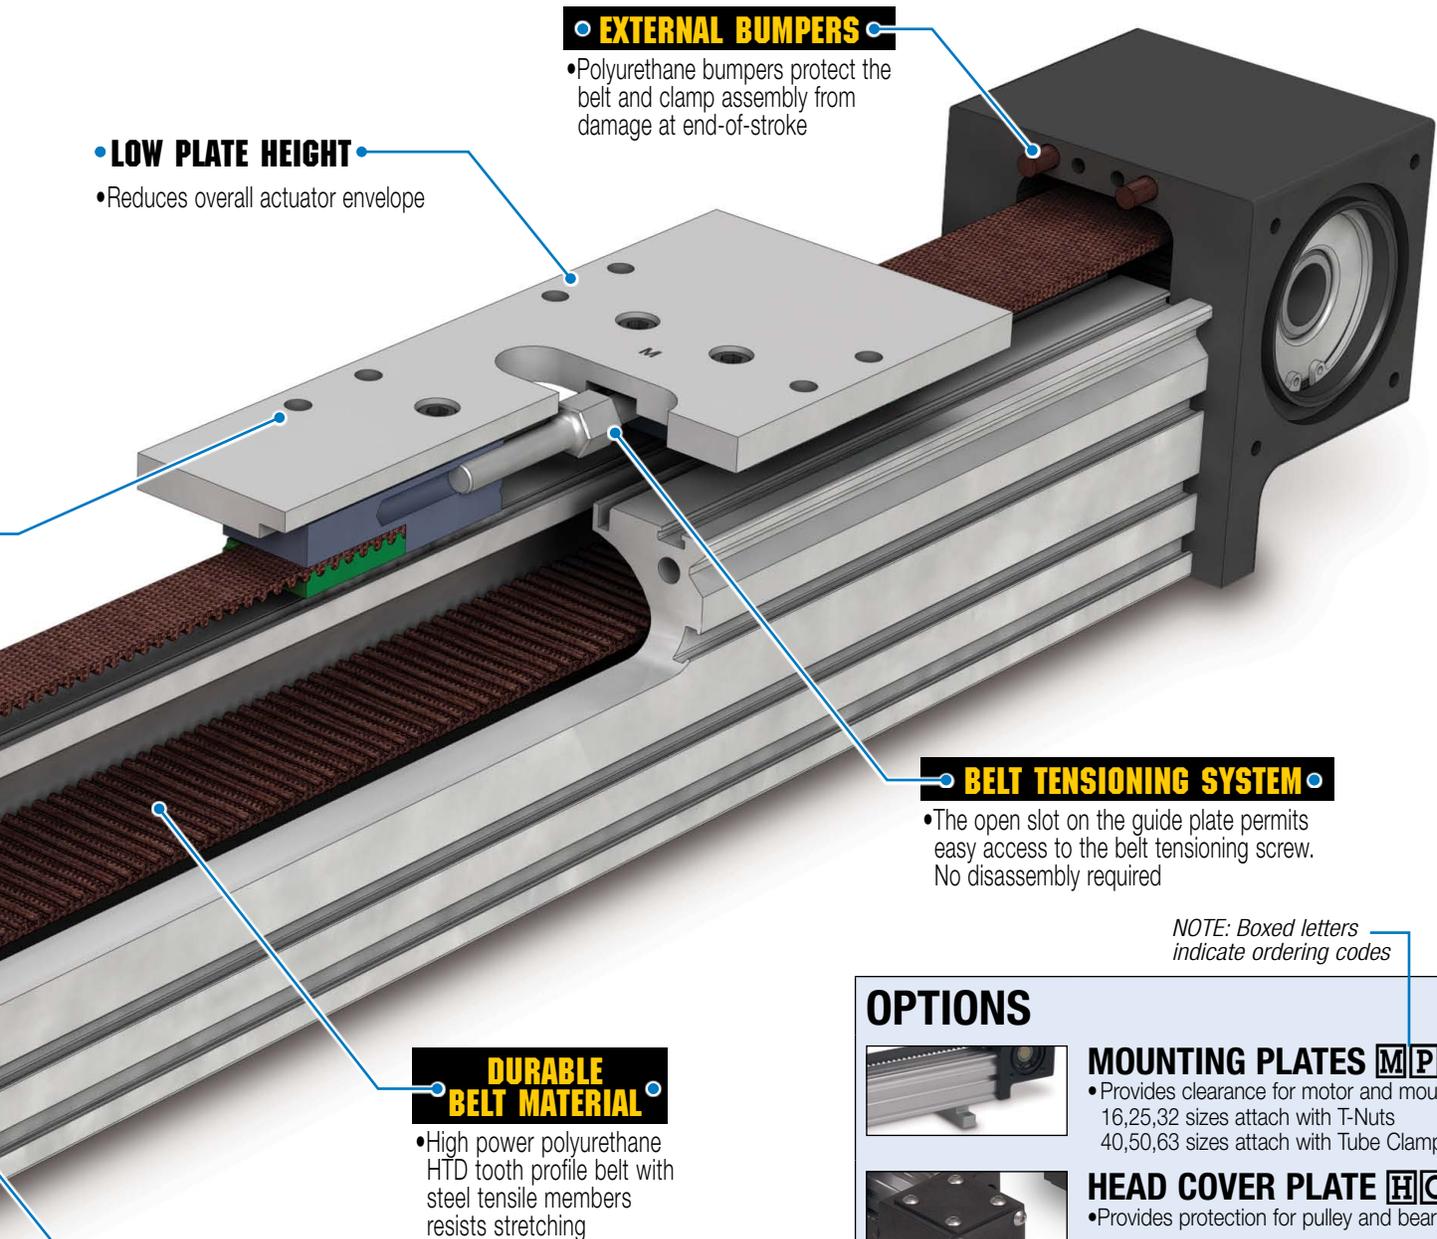

• LOW PLATE HEIGHT
• Reduces overall actuator envelope

EXTERNAL BUMPERS

• Polyurethane bumpers protect the belt and clamp assembly from damage at end-of-stroke

BELT TENSIONING SYSTEM

• The open slot on the guide plate permits easy access to the belt tensioning screw. No disassembly required

DURABLE BELT MATERIAL

• High power polyurethane HTD tooth profile belt with steel tensile members resists stretching

LIGHTWEIGHT ALUMINUM DESIGN

• Clear anodized extrusion design is optimized for rigidity and strength

NOTE: Boxed letters indicate ordering codes

OPTIONS



MOUNTING PLATES MP

• Provides clearance for motor and mount
16,25,32 sizes attach with T-Nuts
40,50,63 sizes attach with Tube Clamps



HEAD COVER PLATE HCP

• Provides protection for pulley and bearing



TUBE CLAMPS TC

• Used for intermediate support
• Flush with bottom of actuator to retain low profile
• Drop-in, adjustable mounting locations (Not available on the MXB16U))



SWITCHES

• Wide variety of sensing choices: Reed, Solid State PNP or NPN, available normally open or normally closed
• Flush mount, drop-in installation
• Bright LEDs, power & signal indication
• CE rated, RoHS compliant

MXB-P PROFILED RAIL BELT DRIVE ACTUATOR

ENDURANCE TECHNOLOGYSM

Endurance TechnologySM features are designed for maximum durability to provide extended service life.

The MXB-P rodless electric belt-drive actuator is designed for applications requiring moderate to heavy load carrying and guidance. The MXB-P actuator features a profiled rail system with recirculating ball linear guides for optimal performance. The MXB-P belt-driven actuator features speeds up to 150 in/sec and thrusts up to 418 lbf. Built-to-order in stroke lengths up to 200 inches.

• LOW CARRIER HEIGHT •

- Reduces overall actuator envelope
- Large mounting pattern for excellent load stability

• DURABLE BELT MATERIAL •

- High power polyurethane HTD tooth profile belt with steel tensile members resists stretching

• OVERSIZED PULLEY BEARINGS •

- Drive shaft assembly incorporates oversized shielded/sealed ball bearings for long life and high speeds

**5 DAYS
BUILT-TO-ORDER**

• INCH OR METRIC MOUNTING •

- Your choice of inch (*US standard*) or metric mounting to the carrier

• MOTOR ORIENTATION •


YOU CAN CHOOSE:

- Direct drive option directly couples motor to the drive shaft; one-piece housing construction for optimum alignment and support of the motor
- Reduction option in 3:1 reduction (2:1 on MXB16)

• YOUR MOTOR HERE •

YOU CAN CHOOSE:

- Motor or gearbox supplied and installed by Tolomatic
- Specify the device to be installed and actuator ships with proper mounting hardware - MXB is a "Your Motor Here" actuator for easy direct drive motor installation. Check our website (www.tolomatic.com/ymh) for complete information
- Specify and ship your device to Tolomatic for factory installation

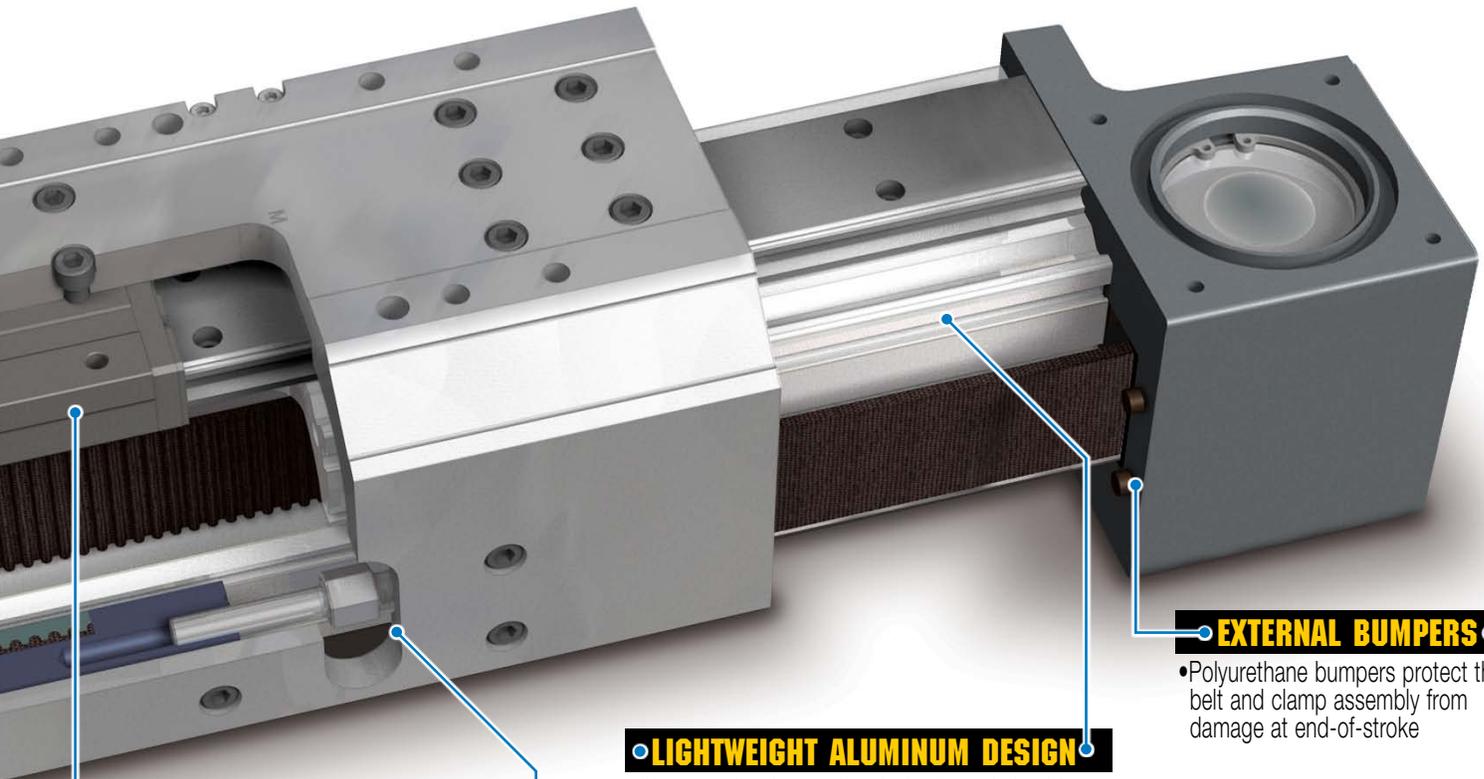

BELT TENSIONING SYSTEM

• The open slot on the carrier side permits easy access to the belt tensioning screw. No disassembly required and no need to remove the load from the carrier

LIGHTWEIGHT ALUMINUM DESIGN


• Clear anodized extrusion design is optimized for rigidity and strength

EXTERNAL BUMPERS

• Polyurethane bumpers protect the belt and clamp assembly from damage at end-of-stroke

RECIRCULATING BALL BEARINGS

- Recirculating ball bearings are used to reduce friction and extend actuator life
- Designed with a grease pocket between ball elements to reduce friction, noise and maintenance
- Large permissible moment loads
- High speed operation, low heat generation
- High precision, smooth, low friction motion

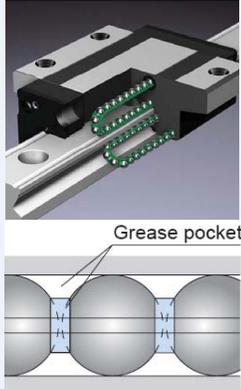

NOTE: Boxed letters indicate ordering codes

OPTIONS



AUXILIARY CARRIER **D****C**
• 2X higher Fz & Fy (load) capacity
• High bending moment capacity



MOUNTING PLATES **M****P**
• Provides clearance for motor and mount
16,25,32 sizes attach with T-Nuts
40,50,63 sizes attach with Tube Clamps



TUBE CLAMPS **T****C**
• Used for intermediate support
• Flush with bottom of actuator to retain low profile
• Drop-in adjustable mounting locations
(Not available on the 16, 25 or 32 MXB-P sizes)



HEAD COVER PLATE **H****C****P**
• Provides protection for pulley and bearing



SWITCHES
• Wide variety of sensing choices: Reed, Solid State PNP or NPN, available normally open or normally closed
• Flush mount, drop-in installation
• Bright LEDs, power & signal indication
• CE rated, RoHS compliant

MXB Rodless Belt Drive Actuators



ACTUATOR SPECIFICATIONS AND BREAKAWAY TORQUE

| U & P MXB SIZE | BELT WIDTH | | BELT DEAD LENGTH | | PULLEY PITCH DIAMETER | | STROKE PER REVOLUTION | | *MAXIMUM STROKE | | BREAKAWAY TORQUE | | | |
|----------------------|------------|----|------------------|-------|-----------------------|------|-----------------------|-------|-----------------|------|------------------|-------|-------------------------------------|-------|
| | | | | | | | | | | | SINGLE CARRIER | | AUXILIARY CARRIER OPT. (MXB-P ONLY) | |
| | in | mm | in | mm | in | mm | in | mm | in | mm | lb-in | N-m | lb-in | N-m |
| 16 | 0.39 | 10 | 14.29 | 363.0 | 0.753 | 19.1 | 2.366 | 60.1 | 230 | 5842 | 4.0 | 0.452 | 6.0 | 0.678 |
| 25 | 0.71 | 18 | 18.72 | 475.5 | 1.003 | 25.5 | 3.151 | 80.0 | 204 | 5181 | 5.0 | 0.565 | 7.0 | 0.791 |
| 32 | 0.98 | 25 | 21.89 | 556.0 | 1.253 | 31.8 | 3.936 | 100.0 | 203 | 5156 | 8.0 | 0.904 | 10.0 | 1.130 |
| 40 | 1.18 | 30 | 24.95 | 633.7 | 1.504 | 38.2 | 4.725 | 120.0 | 202 | 5130 | 10.0 | 1.130 | 12.0 | 1.356 |
| 50 | 1.57 | 40 | 27.25 | 692.2 | 1.754 | 44.6 | 5.510 | 140.0 | 202 | 5130 | 15.0 | 1.695 | 18.0 | 2.034 |
| 63 | 1.97 | 50 | 36.11 | 917.2 | 2.130 | 54.1 | 6.692 | 170.0 | 102 | 2590 | 20.0 | 2.260 | 25.0 | 2.825 |

*Longer lengths may be possible with use of tube couplers - Contact Tolomatic

| U MXB-U SIZE | WEIGHT | | | | | | | | INERTIA | | | | | | | |
|--------------------|----------------|------|-------------------------|------|---------------|------|--------------------|--------|------------------------------|--------------------|--|--------------------|--------------------|--------------------|--|--|
| | PLATE ASSEMBLY | | BELT TENSIONER ASSEMBLY | | BASE ACTUATOR | | PER UNIT OF STROKE | | DRIVE/IDLE PULLEY ASSEMBLIES | | PLATE ASSEMBLY (INCLUDING BELT TENSIONER ASSEMBLY) | | PER UNIT OF STROKE | | | |
| | lb | kg | lb | kg | lb | kg | lb/in | kg/cm | lb-in ² | kg-cm ² | lb-in ² | kg-cm ² | lb-in ² | kg-cm ² | | |
| 16 | 0.11 | 0.05 | 0.10 | 0.05 | 1.59 | 0.72 | 0.084 | 0.0150 | 0.0085 | 0.0250 | 0.0335 | 0.0980 | 0.0005 | 0.0006 | | |
| 25 | 0.27 | 0.12 | 0.15 | 0.07 | 2.59 | 1.17 | 0.138 | 0.0246 | 0.0259 | 0.0759 | 0.1201 | 0.3515 | 0.0017 | 0.0020 | | |
| 32 | 0.48 | 0.22 | 0.30 | 0.13 | 4.17 | 1.89 | 0.237 | 0.0423 | 0.1416 | 0.4143 | 0.3451 | 1.0099 | 0.0037 | 0.0043 | | |
| 40 | 0.90 | 0.41 | 0.46 | 0.21 | 7.83 | 3.55 | 0.352 | 0.0629 | 0.3719 | 1.0884 | 0.8487 | 2.4836 | 0.0065 | 0.0075 | | |
| 50 | 1.03 | 0.47 | 0.72 | 0.33 | 9.93 | 4.50 | 0.472 | 0.0843 | 0.7243 | 2.1196 | 1.5103 | 4.4198 | 0.0117 | 0.0135 | | |
| 63 | 2.54 | 1.15 | 0.83 | 0.38 | 16.44 | 7.46 | 0.833 | 0.1488 | 1.9512 | 5.7101 | 4.2168 | 12.3401 | 0.0216 | 0.0249 | | |

| P MXB-P SIZE | WEIGHT | | | | | | | | INERTIA | | | | | | | |
|--------------------|------------------|------|-------------------------|------|---------------|-------|--------------------|--------|------------------------------|--------------------|--|---------|------------------------|---------|--------------------|--------------------|
| | CARRIER ASSEMBLY | | BELT TENSIONER ASSEMBLY | | BASE ACTUATOR | | PER UNIT OF STROKE | | DRIVE/IDLE PULLEY ASSEMBLIES | | CARRIER ASSEMBLY (INCLUDING BELT TENSIONER ASSEMBLY) | | | | PER UNIT OF STROKE | |
| | lb | kg | lb | kg | lb | kg | lb/in | kg/cm | lb-in ² | kg-cm ² | SINGLE CARRIER | | AUXILIARY CARRIER OPT. | | lb-in ² | kg-cm ² |
| 16 | 0.39 | 0.18 | 0.10 | 0.05 | 2.38 | 1.08 | 0.102 | 0.0183 | 0.0085 | 0.0250 | 0.4856 | 1.4211 | 0.8716 | 2.5506 | 0.0005 | 0.0006 |
| 25 | 0.84 | 0.38 | 0.15 | 0.07 | 4.36 | 1.98 | 0.195 | 0.0348 | 0.0259 | 0.0759 | 0.9914 | 2.9013 | 1.8353 | 5.3708 | 0.0017 | 0.0020 |
| 32 | 1.64 | 0.74 | 0.30 | 0.13 | 7.83 | 3.55 | 0.318 | 0.0569 | 0.1416 | 0.4143 | 1.9356 | 5.6642 | 3.5757 | 10.4641 | 0.0037 | 0.0043 |
| 40 | 2.51 | 1.14 | 0.46 | 0.21 | 14.07 | 6.38 | 0.537 | 0.0959 | 0.3719 | 1.0884 | 2.9693 | 8.6893 | 5.4832 | 16.0460 | 0.0065 | 0.0075 |
| 50 | 5.03 | 2.28 | 0.72 | 0.33 | 20.84 | 9.45 | 0.749 | 0.1337 | 0.7243 | 2.1196 | 5.7498 | 16.8263 | 10.7770 | 31.5378 | 0.0117 | 0.0135 |
| 63 | 9.36 | 4.25 | 0.83 | 0.38 | 37.24 | 16.89 | 1.110 | 0.1981 | 1.9512 | 5.7101 | 10.1930 | 29.8288 | 19.5537 | 57.2221 | 0.0216 | 0.0249 |

MAXIMUM VELOCITY U 200 in/sec 5080 mm/sec

MAXIMUM VELOCITY P 150 in/sec 3810 mm/sec

MAXIMUM ACCELERATION 1200 in/sec² 30.48 m/sec²

REPEATABILITY ± 0.002 in ± 0.051 mm

TEMPERATURE RANGE 10 to 130 °F -12 to 54 °C

⚠ Heat generated by the motor and drive should be taken into consideration as well as linear velocity and work cycle time. For applications that require operation outside of the recommended temperature range, contact the factory.

STRAIGHTNESS, FLATNESS 0.00067 L in 0.01702 L mm


Actuator mounted on a flat surface and fully restrained (see Mounting Plate Requirements, page mx_b_11) L = Maximum distance between supports

⚠ The listed values relating to straightness/flatness are intended for reference purposes only, and not as an engineering standard of absolute tolerance for a given actuator. Appropriate installation is the single most important factor in reducing variation, so good engineering practices such as measurement, mapping, etc. must be employed in applications with stringent straightness/flatness requirements.



MXB Rodless Belt Drive Actuators



MAXIMUM ACCELERATION AS A FUNCTION OF LOAD WEIGHT (U & P)

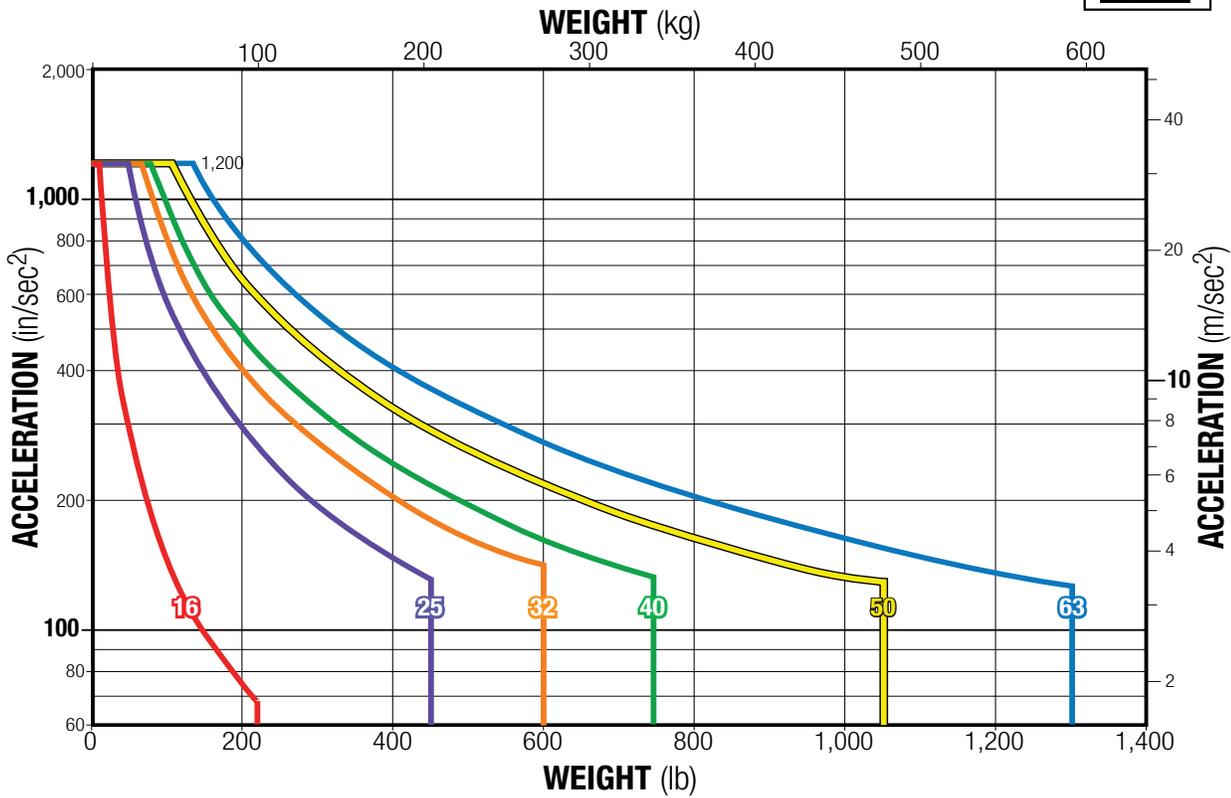

MOUNTING PLATE REQUIREMENTS (P ONLY)

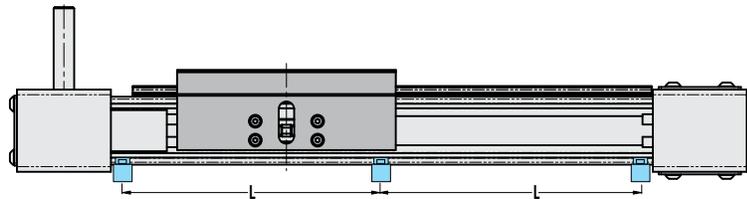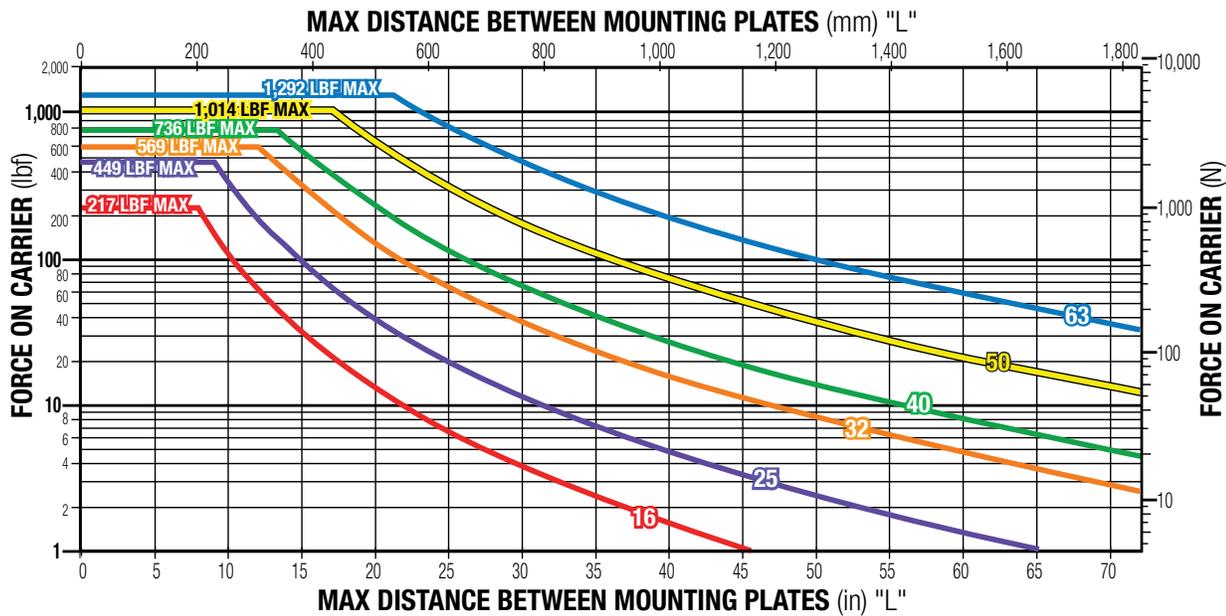


MXB-P Rodless Belt Drive Actuator



MOMENT AND LOAD CAPACITY


⚠ Mating surface of mounted component must maintain a flatness of at least .0015" [0.040 mm]

STANDARD CARRIER



| SIZE | MAXIMUM BENDING MOMENTS | | | | | | MAXIMUM LOAD | | | | MAXIMUM THRUST | |
|------|-------------------------|------|--------|------|--------|------|--------------|-------|-------|-------|----------------|-------|
| | Mx | | My | | Mz | | Fy | | Fz | | Ibf | N |
| | in-lbs | N-m | in-lbs | N-m | in-lbs | N-m | lbf | N | lbf | N | Ibf | N |
| 16 | 39 | 4.5 | 339 | 38.3 | 339 | 38.3 | 217 | 966 | 217 | 966 | 38 | 169 |
| 25 | 126 | 14.3 | 502 | 56.7 | 377 | 42.6 | 449 | 1,996 | 449 | 1,996 | 151 | 672 |
| 32 | 226 | 25.6 | 1,344 | 152 | 1,344 | 152 | 569 | 2,531 | 569 | 2,531 | 209 | 930 |
| 40 | 604 | 68.2 | 1,913 | 216 | 1,913 | 216 | 736 | 3,274 | 736 | 3,274 | 250 | 1,112 |
| 50 | 811 | 91.7 | 3,483 | 394 | 3,483 | 394 | 1,014 | 4,510 | 1,014 | 4,510 | 325 | 1,446 |
| 63 | 1,019 | 115 | 5,339 | 603 | 5,339 | 603 | 1,292 | 5,745 | 1,292 | 5,745 | 418 | 1,859 |

DC AUXILIARY CARRIER



| SIZE | "D" MINIMUM | | MAXIMUM BENDING MOMENTS* | | | | | | MAXIMUM LOAD | | | |
|------|-------------|-----|--------------------------|------|--------|-------|--------|-------|--------------|--------|-------|--------|
| | in | mm | Mxa | | Mya | | Mza | | Fya | | Fza | |
| | | | in-lbs | N-m | in-lbs | N-m | in-lbs | N-m | lbf | N | lbf | N |
| 16 | 5.0 | 127 | 79 | 8.9 | 620 | 70.0 | 620 | 70.0 | 434 | 1,932 | 434 | 1,932 |
| 25 | 6.0 | 152 | 252 | 28.5 | 1,610 | 182 | 1,610 | 182 | 898 | 3,993 | 898 | 3,993 |
| 32 | 7.0 | 178 | 453 | 51.1 | 2,202 | 249 | 2,202 | 249 | 1,138 | 5,063 | 1,138 | 5,063 |
| 40 | 8.5 | 216 | 1,208 | 136 | 3,601 | 407 | 3,601 | 407 | 1,472 | 6,549 | 1,472 | 6,549 |
| 50 | 8.6 | 218 | 1,623 | 183 | 4,966 | 561 | 4,966 | 561 | 2,028 | 9,020 | 2,028 | 9,020 |
| 63 | 13.0 | 330 | 2,038 | 230 | 9,508 | 1,074 | 9,508 | 1,074 | 2,583 | 11,490 | 2,583 | 11,490 |

*At minimum "D" distance - see page MXB_13 for bending moments at greater distances




Use sizing software or call Tolomatic (1-800-328-2174) with application information. We will provide any assistance needed to determine the proper MXB belt-drive actuator.

⚠ **The above ratings are the maximum values for shock-free, vibration-free operation in a typical industrial environment, which must not be exceeded even in dynamic operation. Contact Tolomatic for assistance in selecting the most appropriate actuator for your application.**

SPEED FACTOR

FOR APPLICATIONS WITH HIGH SPEED OR SIGNIFICANT SHOCK AND VIBRATION: Calculated values of loads and bending moments must be increased by speed factor from the graph at right to obtain full rated life of profiled rail bearing system.

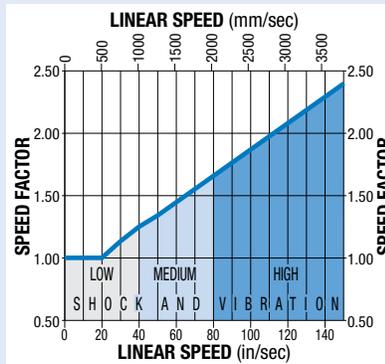

PROFILED RAIL LUBRICATION

Proper lubrication of profiled rail bearing system is essential for normal operation and achievement of full rated life of MXB-P actuators. Lubrication should be performed at intervals of 4,000,000 inches of travel or once every year, whichever occurs first. **However, operating conditions such as high speed or significant shock and vibration may require more frequent lubrication.** Please consult Tolomatic for recommendations.

Recommended grease types:

1. Refined mineral oil-based multi-purpose grease with lithium thickening agent.
2. High-grade synthetic oil-based grease with urea thickening agent.

The moment and load capacity of the actuator's bearing system is based on an L10 life of 200,000,000 linear inches of travel. Life of the actuator will vary for each application depending on the combined loads, motion parameters and operating conditions. The load factor (L_f) for each application must not exceed a value of 1 (as calculated below). Exceeding a load factor of 1 will diminish the actuator's rated life.

$$L_f = \frac{M_x}{M_{x_{max}}} + \frac{M_y}{M_{y_{max}}} + \frac{M_z}{M_{z_{max}}} + \frac{F_y}{F_{y_{max}}} + \frac{F_z}{F_{z_{max}}} \leq 1$$

With combined loads, L_f must not exceed the value 1.

MXB-P Rodless Belt Drive Actuator

SIZING SOFTWARE
AVAILABLE AT WWW.
TOLOMATIC.COM

ACTUATOR





SIZING



LOAD DEFLECTION

DEFLECTION TESTING WAS DONE UNDER THESE CRITERIA:
 1.) Actuator was properly mounted with distance between mounting plates within recommendations
 2.) Deflection was measured at 12" from center of carrier as shown (see Mounting Plate Requirements page no. 11)



DEFLECTION ABOUT X AXIS

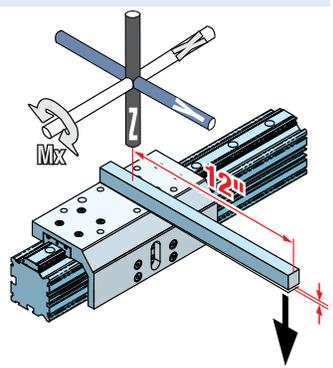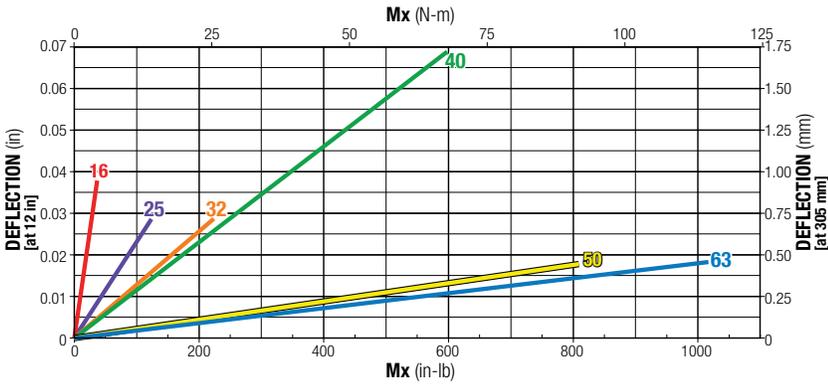


DEFLECTION ABOUT Y AXIS

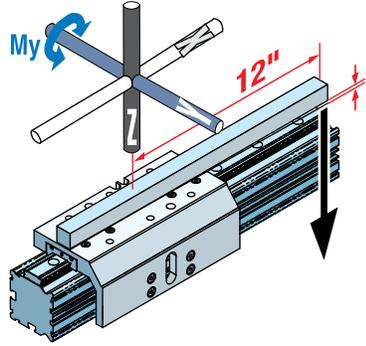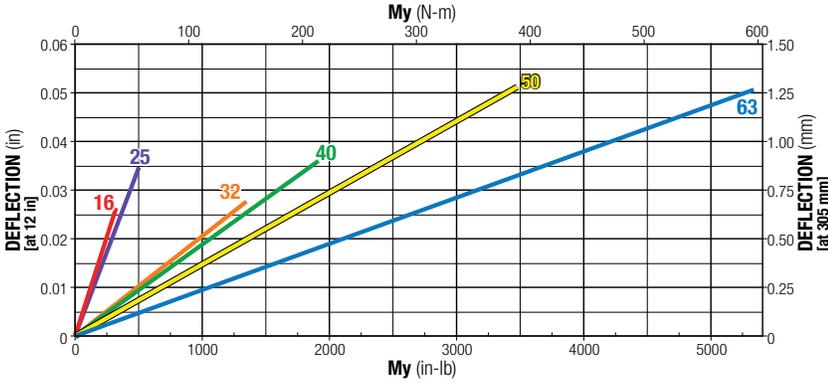

DEFLECTION ABOUT Z AXIS

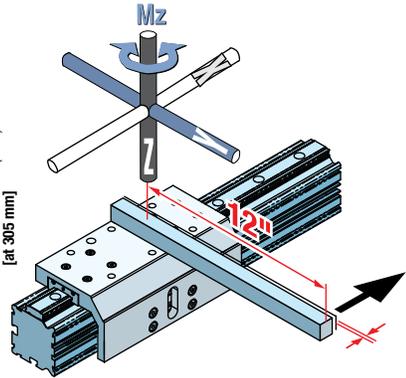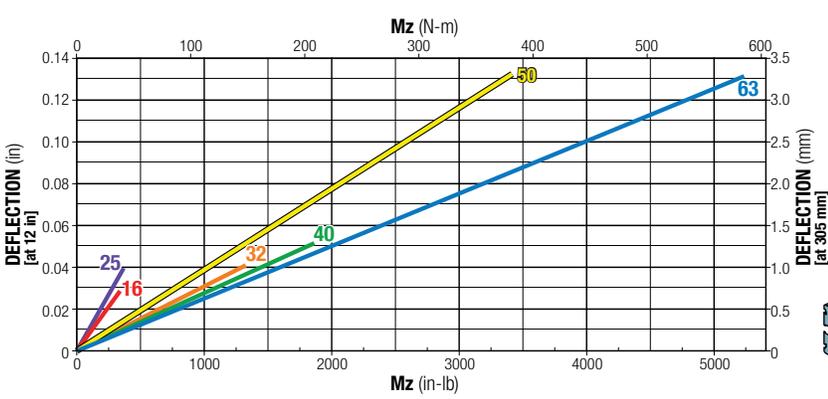

AUXILIARY CARRIER BENDING MOMENTS WITH INCREASED "D" DISTANCE BETWEEN CARRIERS

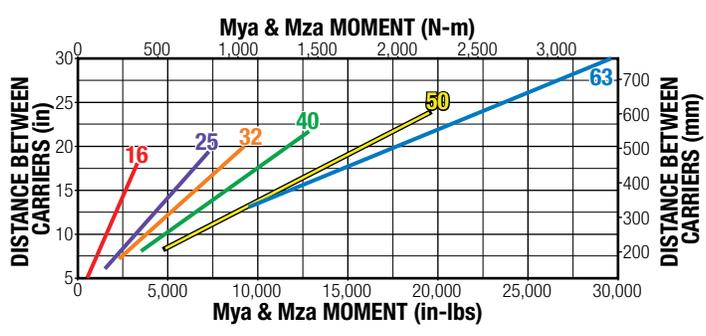


RATINGS WERE CALCULATED UNDER THESE CRITERIA:

- 1.) Coupling between carriers is rigid.
- 2.) Load is equally distributed between carriers.
- 3.) Coupling device applies no misalignment loads to carriers.

MXB-U Rodless Belt Drive Actuator



ACTUATOR & OPTION DIMENSIONS

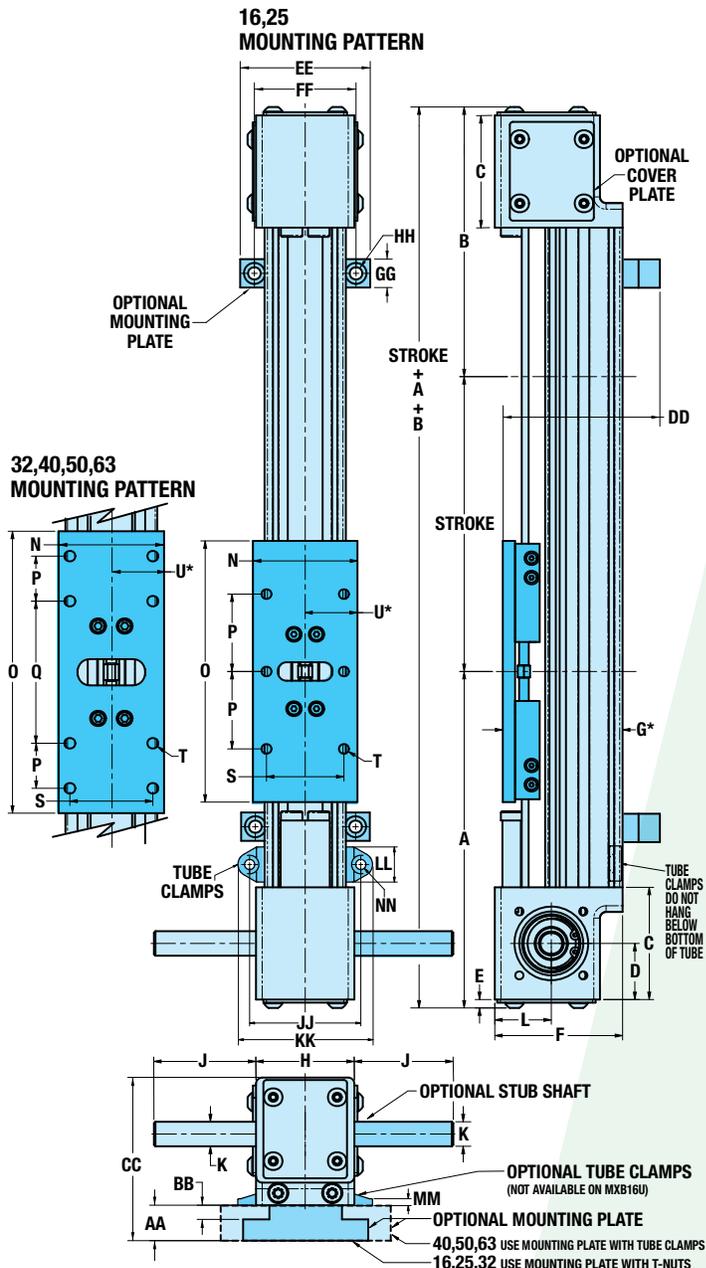

| | MXB16 | MXB25 | MXB32 | MXB40 | MXB50 | MXB63 |
|----|----------|-----------|------------|------------|------------|-----------|
| A | 5.33 | 6.85 | 7.39 | 8.53 | 8.85 | 10.83 |
| mm | 135.3 | 173.9 | 187.8 | 216.6 | 224.7 | 275.1 |
| B | 4.69 | 5.49 | 6.09 | 7.59 | 8.07 | 10.33 |
| mm | 119.0 | 139.3 | 154.7 | 192.7 | 205.0 | 262.1 |
| C | 2.00 | 2.28 | 2.20 | 3.10 | 3.25 | 3.79 |
| mm | 50.8 | 58.0 | 55.9 | 78.7 | 82.6 | 96.1 |
| D | 1.00 | 1.14 | 1.00 | 1.55 | 1.58 | 1.79 |
| mm | 25.4 | 29.0 | 25.4 | 39.4 | 40.0 | 45.3 |
| E | 0.15 | 0.17 | 0.17 | 0.17 | 0.17 | 0.17 |
| mm | 3.8 | 4.4 | 4.4 | 4.4 | 4.4 | 4.4 |
| F | 2.08 | 2.60 | 3.05 | 3.69 | 4.35 | 5.48 |
| mm | 52.8 | 66.0 | 77.5 | 93.8 | 110.6 | 139.3 |
| G* | 1.77 | 2.44 | 3.05 | 3.48 | 4.31 | 5.34 |
| mm | 45.3 | 61.9 | 77.4 | 88.3 | 109.6 | 135.5 |
| H | 1.75 | 2.00 | 2.75 | 3.25 | 3.88 | 4.38 |
| mm | 44.5 | 50.8 | 69.9 | 82.6 | 98.4 | 111.1 |
| J | ** | 2.27 | 2.27 | 1.87 | 1.87 | 1.87 |
| mm | ** | 57.7 | 57.7 | 47.5 | 47.5 | 47.5 |
| K | 0.375 | 0.500 | 0.500 | 0.500 | 0.500 | 0.500 |
| mm | 09.53 | 012.70 | 012.70 | 012.70 | 012.70 | 012.70 |
| L | 1.04 | 1.15 | 1.10 | 1.56 | 1.63 | 2.06 |
| mm | 26.4 | 29.2 | 27.9 | 39.7 | 41.5 | 52.2 |
| N | 1.38 | 2.13 | 2.50 | 3.50 | 3.75 | 4.50 |
| mm | 34.9 | 54.0 | 63.5 | 88.9 | 95.3 | 114.3 |
| O | 4.33 | 5.31 | 6.69 | 7.87 | 8.50 | 12.00 |
| mm | 110.0 | 135.0 | 170.0 | 200.0 | 216.0 | 304.8 |
| P | 1.57 | 1.57 | 1.07 | 1.00 | 1.00 | 1.57 |
| mm | 40.0 | 40.0 | 27.1 | 25.4 | 25.4 | 40.0 |
| Q | - | - | 3.37 | 4.50 | 2.75 | 5.12 |
| mm | - | - | 87.7 | 114.3 | 69.8 | 130.0 |
| S | 1.10 | 1.57 | 1.97 | 2.83 | 3.13 | 3.87 |
| mm | 28.0 | 40.0 | 50.0 | 72.0 | 79.4 | 98.3 |
| T | #3-32(6) | 1/4-20(6) | 5/16-18(8) | 5/16-18(8) | 5/16-18(8) | 3/8-16(8) |
| mm | M4x0.7 | M6x1.0 | M8x1.25 | M8x1.25 | M8x1.25 | M10x1.5 |
| U* | 0.69 | 1.07 | 1.25 | 1.75 | 1.88 | 2.25 |
| mm | 17.5 | 27.0 | 31.8 | 44.5 | 47.7 | 57.2 |

OPTIONAL MOUNTING PLATES

| | MXB16 | MXB25 | MXB32 | MXB40 | MXB50 | MXB63 |
|----|--------------------------------|--------------------------------|--------------------------------|---------------------|---------------------|---------------------|
| AA | 0.63 | 0.63 | 0.75 | 1.00 | 1.25 | 1.00 |
| mm | 15.9 | 15.9 | 19.1 | 25.4 | 31.8 | 25.4 |
| BB | 0.25 | 0.25 | 0.30 | - | - | - |
| mm | 6.4 | 6.4 | 7.6 | - | - | - |
| CC | 2.71 | 3.22 | 3.80 | 4.70 | 5.60 | 6.48 |
| mm | 68.7 | 81.9 | 96.5 | 119.4 | 119.4 | 164.6 |
| DD | 2.4 | 3.06 | 3.75 | 4.18 | 5.01 | 6.04 |
| mm | 60.9 | 77.7 | 95.2 | 106.1 | 127.4 | 153.3 |
| EE | 2.36 | 2.50 | 3.40 | 5.00 | 5.60 | 8.00 |
| mm | 60.0 | 63.5 | 86.4 | 127.0 | 142.2 | 203.2 |
| FF | 1.75 | 2.00 | 2.75 | 4.41 | 5.00 | 7.00 |
| mm | 44.5 | 50.8 | 59.9 | 112.0 | 127.0 | 177.8 |
| GG | 1.00 | 1.00 | 1.00 | 0.79 | 0.79 | 1.00 |
| mm | 25.4 | 25.4 | 25.4 | 20.1 | 20.1 | 25.4 |
| HH | 0.22 THRU □0.37 ▽22 (2) | 0.22 THRU □0.37 ▽22 (2) | 0.28 THRU □0.44 ▽28 (2) | 0.28 THRU (2) | 0.28 THRU (2) | 0.28 THRU (2) |
| mm | 05.6 THRU □09.4 ▽5.6 (2) | 05.6 THRU □09.4 ▽5.6 (2) | 07.1 THRU □11.2 ▽7.1 (2) | 07.1 THRU (2) | 07.1 THRU (2) | 07.1 THRU (2) |

A *In order for the actuator to operate properly, dimensions "G" and "U" must not vary more than ±0.020 in [0.51mm] over the entire length of the stroke.

| ** MXB16 |
|--------------|
| (LMI) J 0.59 |
| mm 15.0 |
| (RP) J 1.83 |
| mm 46.6 |


OPTIONAL TUBE CLAMPS

| | MXB16 | MXB25 | MXB32 | MXB40 | MXB50 | MXB63 |
|----|-------|-------|-------|-------|-------|-------|
| JJ | - | 2.24 | 2.92 | 3.26 | 3.84 | 5.19 |
| mm | - | 57.0 | 74.1 | 82.7 | 97.5 | 131.7 |
| KK | - | 2.72 | 3.44 | 3.81 | 4.39 | 5.93 |
| mm | - | 69.0 | 87.4 | 96.7 | 111.5 | 150.7 |
| LL | - | 0.71 | 0.63 | 0.55 | 0.55 | 0.75 |
| mm | - | 18.0 | 16.0 | 14.0 | 14.0 | 19.0 |
| MM | - | 0.14 | 0.17 | 0.15 | 0.15 | 0.24 |
| mm | - | 3.6 | 4.3 | 3.8 | 3.8 | 6.1 |
| NN | - | 0.20 | 0.28 | 0.28 | 0.28 | 0.42 |
| mm | - | 5.2 | 7.1 | 7.1 | 7.1 | 10.7 |

MXB-P Rodless Belt Drive Actuator



ACTUATOR DIMENSIONS

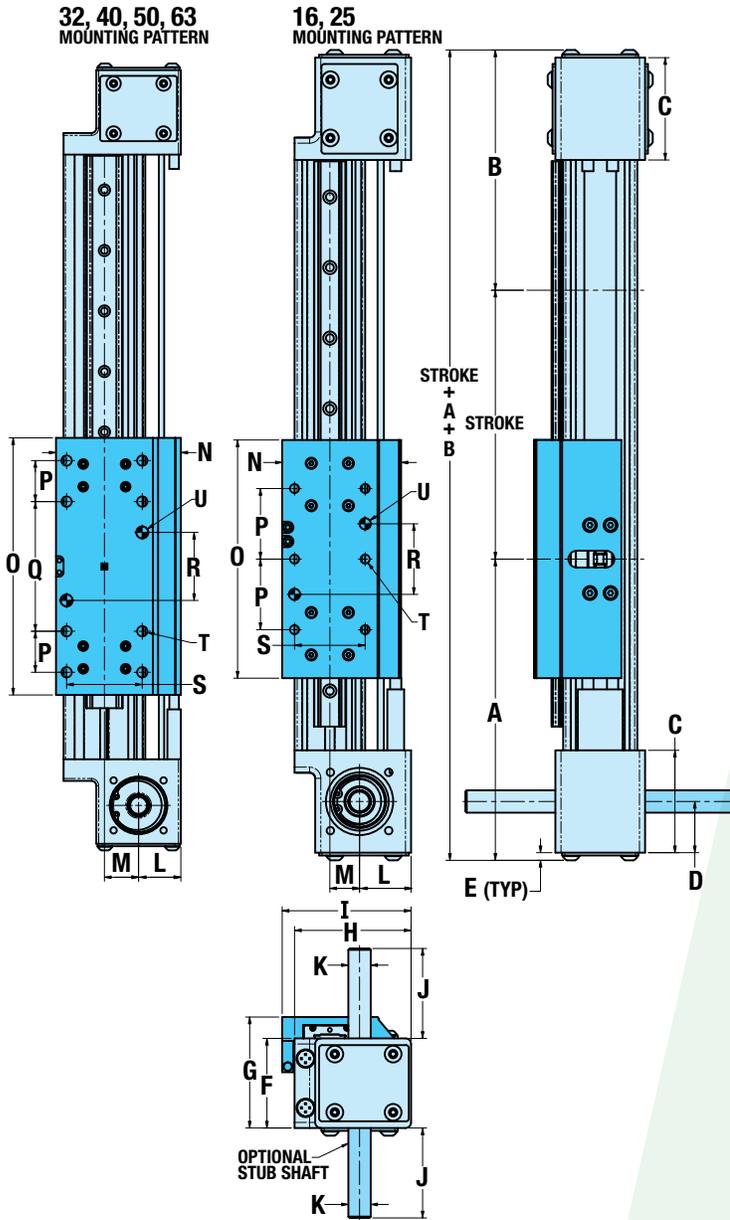


| | MXB16 | MXB25 | MXB32 | MXB40 | MXB50 | MXB63 |
|----|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| A | 5.33 | 6.85 | 7.39 | 8.53 | 8.85 | 10.83 |
| mm | 135.3 | 173.9 | 187.8 | 216.6 | 224.7 | 275.1 |
| B | 4.69 | 5.49 | 6.09 | 7.59 | 8.07 | 10.33 |
| mm | 119.0 | 139.3 | 154.7 | 192.7 | 205.0 | 262.1 |
| C | 2.00 | 2.28 | 2.20 | 3.10 | 3.25 | 3.79 |
| mm | 50.8 | 58.0 | 55.9 | 78.7 | 82.6 | 96.1 |
| D | 1.00 | 1.14 | 1.00 | 1.55 | 1.58 | 1.79 |
| mm | 25.4 | 29.0 | 25.4 | 39.4 | 40.0 | 45.3 |
| E | 0.15 | 0.17 | 0.17 | 0.17 | 0.17 | 0.17 |
| mm | 3.8 | 4.4 | 4.4 | 4.4 | 4.4 | 4.4 |
| F | 1.75 | 2.00 | 2.75 | 3.25 | 3.88 | 4.38 |
| mm | 44.5 | 50.8 | 69.9 | 82.6 | 98.4 | 111.1 |
| G | 2.10 | 2.48 | 3.33 | 3.88 | 5.10 | 5.73 |
| mm | 53.2 | 62.9 | 84.6 | 98.7 | 129.6 | 145.6 |
| H | 2.08 | 2.60 | 3.05 | 3.69 | 4.35 | 5.48 |
| mm | 52.8 | 66.0 | 77.5 | 93.8 | 110.6 | 139.3 |
| I | 2.16 | 2.87 | 3.25 | 4.09 | 4.64 | 5.79 |
| mm | 54.8 | 73.0 | 82.5 | 103.9 | 117.9 | 147.1 |
| J | ** | 2.27 | 2.27 | 1.87 | 1.87 | 1.87 |
| mm | ** | 57.7 | 57.7 | 47.5 | 47.5 | 47.5 |
| K | 0.375 | 0.500 | 0.500 | 0.500 | 0.500 | 0.500 |
| mm | 09.53 | 012.70 | 012.70 | 012.70 | 012.70 | 012.70 |
| L | 1.04 | 1.15 | 1.10 | 1.56 | 1.63 | 2.06 |
| mm | 26.4 | 29.2 | 27.9 | 39.7 | 41.5 | 52.2 |
| M | 0.45 | 0.66 | 0.89 | 0.87 | 1.17 | 1.46 |
| mm | 11.4 | 16.8 | 22.6 | 22.2 | 29.8 | 37.1 |
| N | 1.78 | 2.65 | 3.25 | 3.85 | 4.62 | 5.93 |
| mm | 45.3 | 67.4 | 82.5 | 97.8 | 117.4 | 150.6 |
| O | 4.33 | 5.31 | 6.69 | 7.87 | 8.50 | 12.00 |
| mm | 110.0 | 135.0 | 170.0 | 200.0 | 216.0 | 304.8 |
| P | 1.57 | 1.57 | 1.07 | 1.00 | 1.00 | 1.57 |
| mm | 40.0 | 40.0 | 27.1 | 25.4 | 25.4 | 40.0 |
| Q | — | — | 3.37 | 4.50 | 2.75 | 5.12 |
| mm | — | — | 87.7 | 114.3 | 69.8 | 130.0 |
| R | 1.57 | 1.57 | 1.77 | 2.50 | 1.50 | 2.56 |
| mm | 40.0 | 40.0 | 45.0 | 63.5 | 38.1 | 65.0 |
| S | 1.10 | 1.57 | 1.97 | 2.83 | 3.13 | 3.87 |
| mm | 28.0 | 40.0 | 50.0 | 72.0 | 79.4 | 98.3 |
| T | #8-32(6) | 1/4-20(6) | 5/16-18(8) | 5/16-18(8) | 5/16-18(8) | 3/8-16(8) |
| mm | M4x0.7 | M6x1.0 | M8x1.25 | M8x1.25 | M8x1.25 | M10x1.5 |
| U | 0.1583 / .1573 (2) ↓.250 | 0.2520 / .2510 (2) ↓.250 | 0.3145 / .3135 (2) ↓.375 | 0.3145 / .3135 (2) ↓.500 | 0.3145 / .3135 (2) ↓.500 | 0.3770 / .3760 (2) ↓.500 |
| mm | 04.045 / 4.020 ↓6.35 | 06.045 / 6.020 ↓6.35 | 08.045 / 8.020 ↓9.53 | 08.045 / 8.020 ↓12.70 | 08.045 / 8.020 ↓12.70 | 010.045 / 10.020 ↓12.70 |

| ** MXB16 | |
|----------|------|
| (LMI) J | 0.59 |
| mm | 15.0 |
| (RP) J | 1.83 |
| mm | 46.6 |

MXB-P Rodless Belt Drive Actuator




OPTION DIMENSIONS

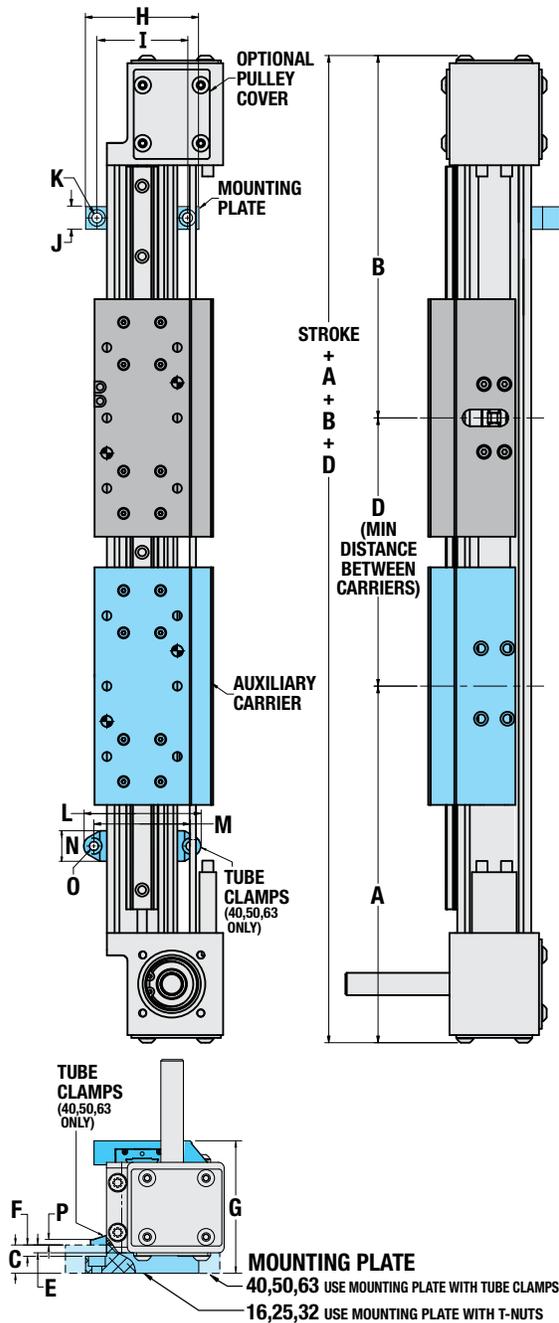


| | MXB16 | MXB25 | MXB32 | MXB40 | MXB50 | MXB63 |
|--------------------------|---|---|---|----------------------|----------------------|----------------------|
| A | 5.33 | 6.85 | 7.39 | 8.53 | 8.85 | 10.83 |
| <i>mm</i> | <i>135.3</i> | <i>173.9</i> | <i>187.8</i> | <i>216.6</i> | <i>224.7</i> | <i>275.1</i> |
| B | 4.69 | 5.49 | 6.09 | 7.59 | 8.07 | 10.33 |
| <i>mm</i> | <i>119.0</i> | <i>139.3</i> | <i>154.7</i> | <i>192.7</i> | <i>205.0</i> | <i>262.1</i> |
| AUXILIARY CARRIER | | | | | | |
| D | 5.00 | 6.00 | 7.00 | 8.50 | 8.60 | 13.00 |
| <i>mm</i> | <i>127.0</i> | <i>152.4</i> | <i>177.0</i> | <i>215.9</i> | <i>216.4</i> | <i>330.2</i> |
| MOUNTING PLATE | | | | | | |
| C | 0.63 | 0.63 | 0.75 | 1.00 | 1.25 | 1.00 |
| <i>mm</i> | <i>15.9</i> | <i>15.9</i> | <i>19.1</i> | <i>25.4</i> | <i>31.8</i> | <i>25.4</i> |
| E | 0.28 | 0.17 | 0.29 | 0.37 | 0.39 | 0.22 |
| <i>mm</i> | <i>7.2</i> | <i>4.4</i> | <i>7.2</i> | <i>9.3</i> | <i>9.8</i> | <i>5.6</i> |
| F | 0.25 | 0.25 | 0.30 | – | – | – |
| <i>mm</i> | <i>6.4</i> | <i>6.4</i> | <i>7.6</i> | – | – | – |
| G | 2.44 | 2.93 | 3.80 | 4.52 | 5.96 | 6.51 |
| <i>mm</i> | <i>61.9</i> | <i>74.4</i> | <i>96.5</i> | <i>114.8</i> | <i>151.4</i> | <i>165.4</i> |
| H | 2.36 | 2.50 | 3.40 | 5.00 | 5.60 | 8.00 |
| <i>mm</i> | <i>60.0</i> | <i>63.5</i> | <i>86.4</i> | <i>127.0</i> | <i>142.2</i> | <i>203.2</i> |
| I | 1.75 | 2.00 | 2.75 | 4.41 | 5.00 | 7.00 |
| <i>mm</i> | <i>44.5</i> | <i>50.8</i> | <i>69.9</i> | <i>112.0</i> | <i>127.0</i> | <i>177.8</i> |
| J | 1.00 | 1.00 | 1.00 | 0.79 | 0.79 | 1.00 |
| <i>mm</i> | <i>25.4</i> | <i>25.4</i> | <i>25.4</i> | <i>20.1</i> | <i>20.1</i> | <i>25.4</i> |
| K | 0.22 THRU └ 0.37 └ 0.22 (2) | 0.22 THRU └ 0.37 └ 0.22 (2) | 0.28 THRU └ 0.44 └ 0.28 (2) | 0.28 THRU (2) | 0.28 THRU (2) | 0.28 THRU (2) |
| <i>mm</i> | <i>05.6 THRU</i> └ <i>09.4</i> └ <i>5.6 (2)</i> | <i>05.6 THRU</i> └ <i>09.4</i> └ <i>5.6 (2)</i> | <i>07.1 THRU</i> └ <i>11.2</i> └ <i>7.1 (2)</i> | <i>07.1 THRU (2)</i> | <i>07.1 THRU (2)</i> | <i>07.1 THRU (2)</i> |
| TUBE CLAMPS | | | | | | |
| L | – | – | – | 3.81 | 4.39 | 5.93 |
| <i>mm</i> | – | – | – | <i>96.8</i> | <i>111.5</i> | <i>150.6</i> |
| M | – | – | – | 3.26 | 3.84 | 5.19 |
| <i>mm</i> | – | – | – | <i>82.8</i> | <i>97.5</i> | <i>131.8</i> |
| N | – | – | – | 0.55 | 0.55 | 0.75 |
| <i>mm</i> | – | – | – | <i>14.0</i> | <i>14.0</i> | <i>19.1</i> |
| O | – | – | – | 0.28 | 0.28 | 0.42 |
| <i>mm</i> | – | – | – | <i>7.1</i> | <i>7.1</i> | <i>10.7</i> |
| P | – | – | – | 0.15 | 0.15 | 0.24 |
| <i>mm</i> | – | – | – | <i>3.8</i> | <i>3.8</i> | <i>6.1</i> |

MXB Rodless Belt Drive Actuators


DIRECT DRIVE MOTOR MOUNTING



MXB-U

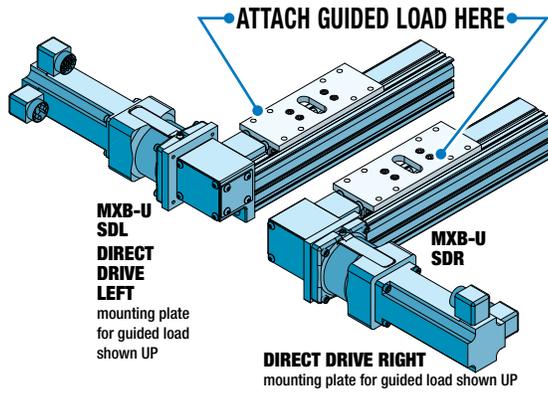

MXB-P

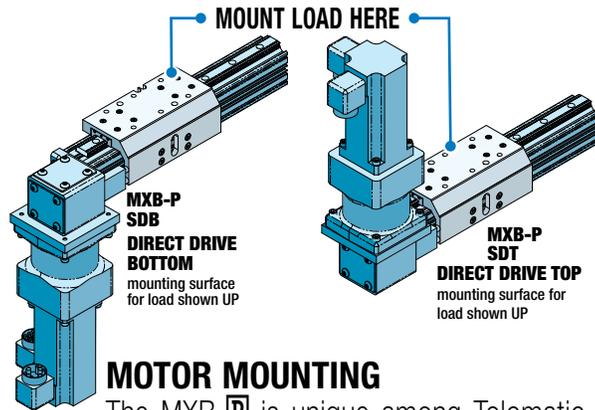

MOTOR MOUNTING


The MXB-P is unique among Tolomatic belt drive actuators. The mounting surface of the carrier is located 90° from the motion of the belt. The side opposite the belt is reserved for switch placement. The bottom of the actuator is reserved for mounting. If the motor is mounted in the SDT (direct drive top orientation), be sure the load mounted to the carrier does not interfere with the motor.




LARGE FRAME MOTORS AND SMALLER SIZE ACTUATORS: Cantilevered motors need to be supported if subjected to continuous rapid reversing duty and/or under dynamic conditions.

REDUCTION DRIVE MOTOR MOUNTING

MXB-U

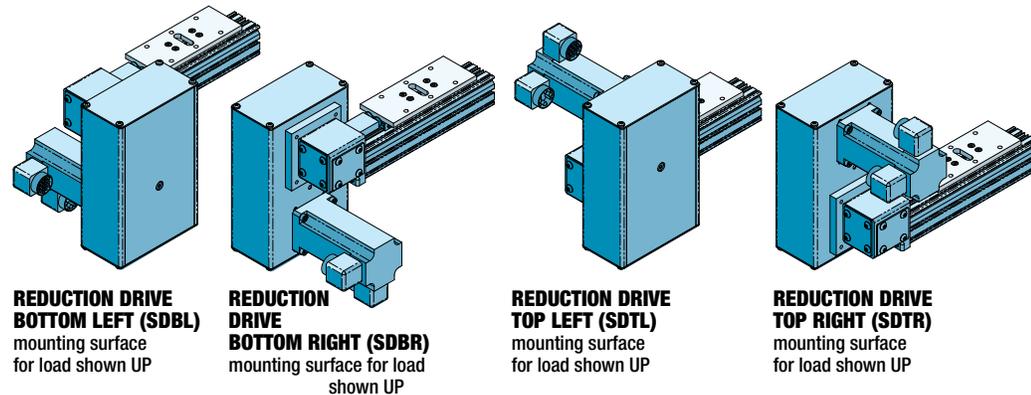

MXB-P

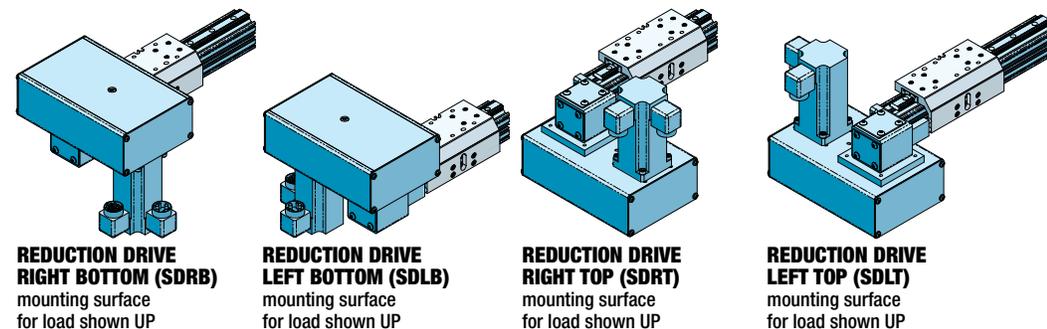

See tolomatic.com for 3D solid model(s) with motor mounting dimensions

MXB-P Rodless Belt Drive Actuator

SWITCHES SPECIFICATIONS



MX products offer a wide range of sensing choices. There are 12 switch choices: reed, solid state PNP (sourcing) or solid state NPN (sinking); in normally open or normally closed; with flying leads or quick-disconnect.

Commonly used for end-of-stroke positioning, these switches allow drop-in installation anywhere along the entire actuator length. The one-piece design includes the retained fastening hardware. The magnet and magnet hardware are located on the carrier. See the dimensional drawings on page [MXB_19](#) for details of magnet and switch locations. Switches and magnets can be installed in the field at any time.

Switches are used to send digital signals to PLC (programmable logic controller), TTL, CMOS circuit or other controller device. Switches contain reverse polarity protection. Solid state QD cables are shielded; shield should be terminated at flying lead end.

All switches are CE rated and are RoHS compliant. Switches feature bright red or yellow LED signal indicators; solid state switches also have green LED power indicators.




| | Order Code | Part Number | Lead | Switching Logic | Power LED | Signal LED | Operating Voltage | **Power Rating (Watts) | Switching Current (mA max.) | Current Consumption | Voltage Drop | Leakage Current | Temp. Range | Shock / Vibration |
|-------------|------------|-------------|------|--------------------------------|-----------|------------|-------------------|------------------------|-----------------------------|---------------------|--------------|-----------------|---------------------------|-------------------|
| REED | R Y | 8100-9082 | 5m | SPST Normally Open | — | Red | 5 - 240 AC/DC | **10.0 | 100mA | — | 3.0 V max. | — | 14 to 158°F [-10 to 70°C] | 50 G / 9 G |
| | R K | 8100-9083 | QD* | | | | | | | | | | | |
| | N Y | 8100-9084 | 5m | SPST Normally Closed | — | Yellow | 5 - 110 AC/DC | | | | | | | |
| | N K | 8100-9085 | QD* | | | | | | | | | | | |
| SOLID STATE | T Y | 8100-9088 | 5m | PNP (Sourcing) Normally Open | Green | Yellow | 10 - 30 VDC | **3.0 | 100mA | 20 mA @ 24V | 2.0 V max. | 0.05 mA max. | | |
| | T K | 8100-9089 | QD* | | | | | | | | | | | |
| | K Y | 8100-9090 | 5m | NPN (Sinking) Normally Open | Green | Red | | | | | | | | |
| | K K | 8100-9091 | QD* | | | | | | | | | | | |
| | P Y | 8100-9092 | 5m | PNP (Sourcing) Normally Closed | Green | Yellow | | | | | | | | |
| | P K | 8100-9093 | QD* | | | | | | | | | | | |
| | H Y | 8100-9094 | 5m | NPN (Sinking) Normally Closed | Green | Red | | | | | | | | |
| | H K | 8100-9095 | QD* | | | | | | | | | | | |

*QD = Quick-disconnect Enclosure classification IEC 529 IP67 (NEMA 6)

CABLES: Robotic grade, oil resistant polyurethane jacket, PVC insulation

⚠️ **WARNING: Do not exceed power rating (Watt = Voltage x Amperage). Permanent damage to sensor will occur.

SWITCH INSTALLATION AND REPLACEMENT








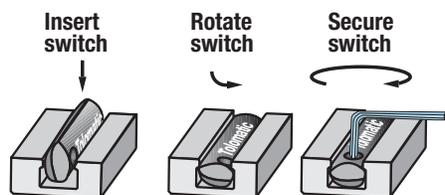


Place switch in side groove on tube at desired location with "Tolomatic" facing outward. While applying light pressure to the switch, rotate the switch halfway into the groove. Maintaining light pressure, rotate the switch in the opposite direction until it is fully inside the groove with "Tolomatic" visible. Re-position the switch to the exact location and lock the switch securely into place by tightening the screw on the switch.


MXB-P Rodless Belt Drive Actuator

SWITCHES

WIRING DIAGRAMS

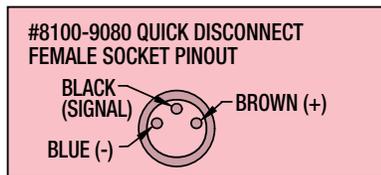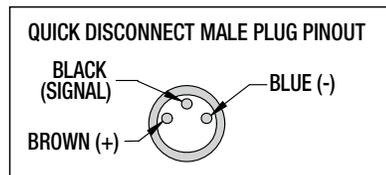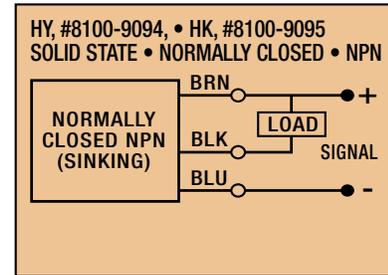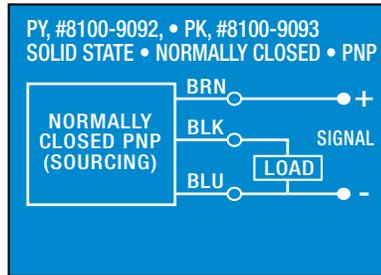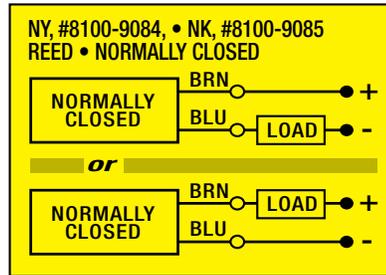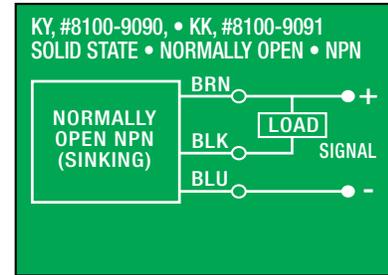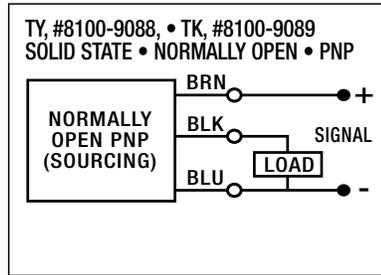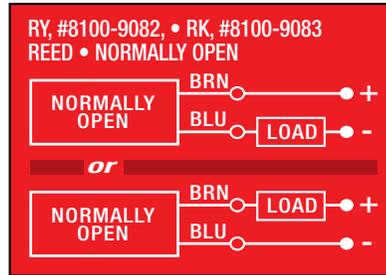


SWITCH DIMENSIONS

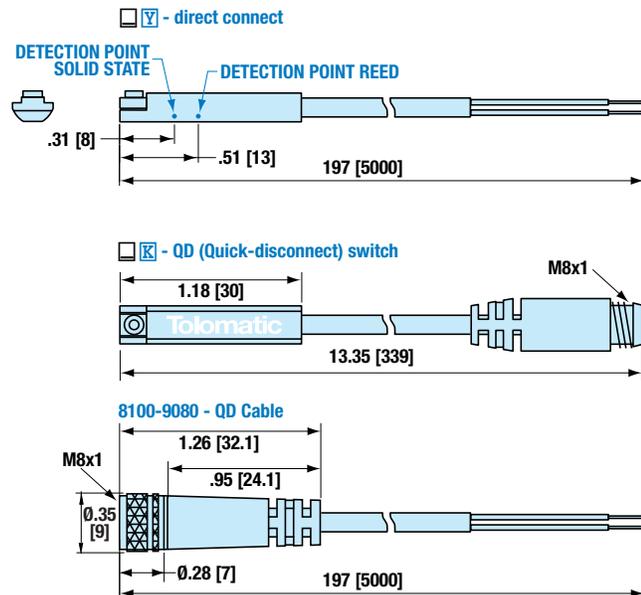


Dimensions in inches [brackets indicate dimensions in millimeters]

MOUNTING DIMENSIONS

MXB-P

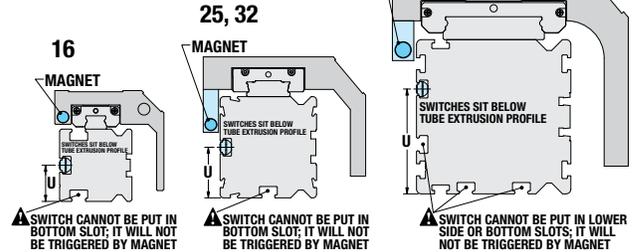

MXB-U

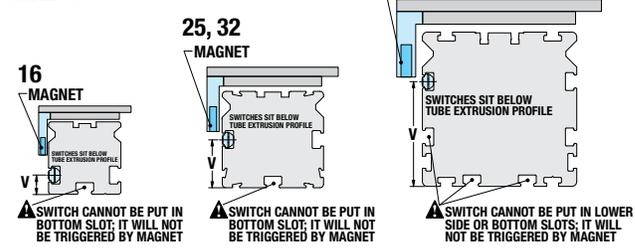


SWITCH MOUNTING

| | 16 | 25 | 32 | 40 | 50 | 63 |
|----|------|------|------|------|------|------|
| U | 0.59 | 0.83 | 1.09 | 1.71 | 2.02 | 2.44 |
| mm | 15.0 | 21.0 | 27.7 | 43.5 | 51.4 | 62.0 |
| V | 0.31 | 0.79 | 1.06 | 1.71 | 2.02 | 2.44 |
| mm | 7.9 | 20.0 | 27.0 | 43.5 | 51.4 | 62.0 |

NOTE: When ordering switches as a service part, Magnet Housing Kit (light blue in drawings) is required if actuator was not originally ordered with switches.

APPLICATION DATA WORKSHEET Fill in known data. Not all information is required for all applications

ORIENTATION

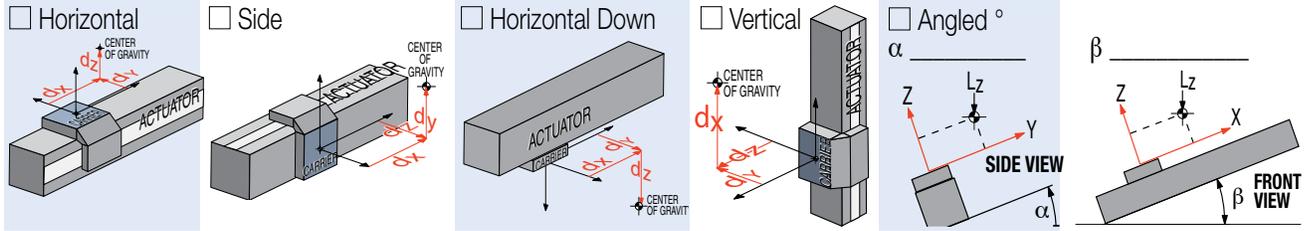

Load attached to carrier OR Load supported by other mechanism

DISTANCE FROM CENTER OF CARRIER TO LOAD CENTER OF GRAVITY

d_x _____
 d_y _____
 d_z _____

inch (U.S. Standard) millimeters (Metric)

STROKE LENGTH

inch (S I K) (U.S. Standard) millimeters (S I M) (Metric)

NOTE: If load or force on carrier changes during cycle use the highest numbers for calculations

LOAD

lb. (U.S. Standard) kg. (Metric)

FORCES APPLIED TO CARRIER

lbf. (U.S. Standard) N (Metric)

F_z _____
 F_y _____

BENDING MOMENTS APPLIED TO CARRIER

in.-lbs. (U.S. Standard) N-m (Metric)

M_x _____
 M_y _____
 M_z _____

PRECISION

Repeatability _____
 inch millimeters

OPERATING ENVIRONMENT

Temperature, Contamination, etc.

MOVE PROFILE

Move Distance _____

inch millimeters

Dwell Time After Move _____

Max. Speed _____

in/sec mm/sec


MOVE TIME

sec

NO. OF CYCLES

per minute per hour

MOTION PROFILE

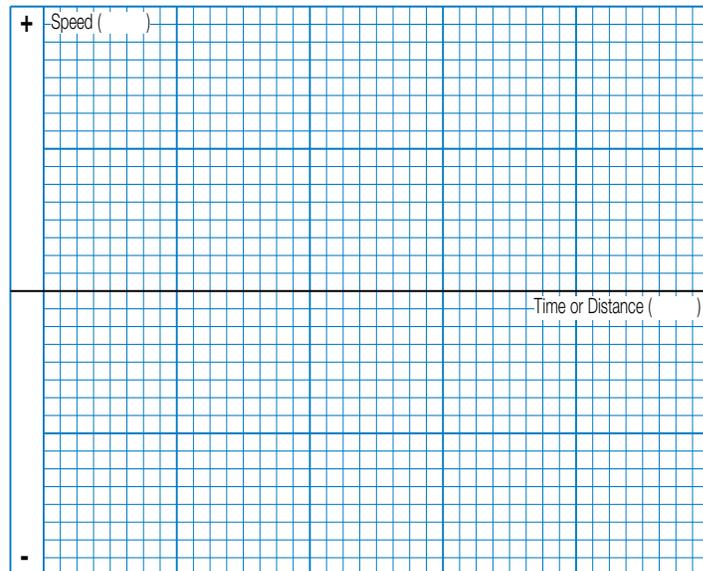

Graph your most demanding cycle, including accel/decel, velocity and dwell times. You may also want to indicate load variations and I/O changes during the cycle. Label axes with proper scale and units.

CONTACT INFORMATION

Name, Phone, Email _____
 Co. Name, Etc. _____



USE THE TOLOMATIC SIZING AND SELECTION SOFTWARE AVAILABLE ON-LINE AT www.tolomatic.com OR... CALL TOLOMATIC AT 1-800-328-2174. We will provide any assistance needed to determine the proper MX actuator for the job.

FAX 1-763-478-8080

EMAIL help@tolomatic.com

SELECTION GUIDELINES

The process of selecting a belt drive actuator for a given application can be complex. **It is highly recommended that you contact Tolomatic or a Tolomatic distributor for assistance in selecting the best actuator for your application.** The following overview of the selection guidelines are for educational purposes only.

1 CHOOSE ACTUATOR SIZE

Choose an actuator that has the thrust, speed and moment load capacity to move the load.

- A) For maximum thrust use the table below.
- B) Maximum speed of MXB-U 200 in/sec (5 m/sec); Maximum speed of MXB-P 150 in/sec (3.8 m/sec).
- C) For MXB-P moment and load capacities see tables on page [MXB_12](#).

| SIZE | MAXIMUM THRUST | |
|------|----------------|------|
| | lbf | N |
| 16 | 38 | 169 |
| 25 | 151 | 672 |
| 32 | 209 | 930 |
| 40 | 250 | 1112 |
| 50 | 325 | 1446 |
| 63 | 418 | 1859 |

2 COMPARE LOAD TO MAXIMUM LOAD CAPACITIES

Calculate the application load (combination of load mass and forces applied to the carrier) and application bending moments (sum of all moments M_x , M_y , and M_z applied to the carrier). Be sure to evaluate the magnitude of dynamic inertia moments. When a rigidly attached load mass is accelerated or decelerated, its inertia induces bending moments on the carrier. Careful attention to how the load is decelerated at the end of the stroke is required for improved actuator performance and application safety. If either load or any of the moments exceed figures indicated in the Moment and Load Capacity tables (page [MXB_12](#)) for the actuator consider:

- 1) A larger actuator size
- 2) Auxiliary carrier
- 3) External guide system (if the load is externally supported and guided, consider using MXB-U)

3 CALCULATE LOAD FACTOR (LF)

For loads with a center of gravity offset from the carrier account for both applied (static) and dynamic loads. The load factor (LF) must not exceed the value of 1.

$$L_f = \frac{M_x}{M_{x_{max}}} + \frac{M_y}{M_{y_{max}}} + \frac{M_z}{M_{z_{max}}} + \frac{F_y}{F_{y_{max}}} + \frac{F_z}{F_{z_{max}}} \leq 1$$


If LF does exceed the value of 1, consider the three choices listed in step #2.

4 ESTABLISH YOUR MOTION PROFILE AND CALCULATE ACCELERATION RATE

Using the application stroke length and maximum carrier velocity (or time to complete the linear motion), establish the motion profile. Select either triangular (accel-decel) or trapezoidal (accel-constant speed-decel) profile. Now calculate the maximum acceleration and deceleration rates of the move. Acceleration/deceleration should not exceed 1200 in/sec² (30.48 m/sec²). Also, do not exceed safe rates of dynamic inertia moments determined in step #3.

SPEED FACTOR

FOR APPLICATIONS WITH HIGH SPEED OR SIGNIFICANT SHOCK AND VIBRATION: Calculated values of loads and bending moments must be increased by speed factor from the graph below to obtain full rated life of profiled rail bearing system.

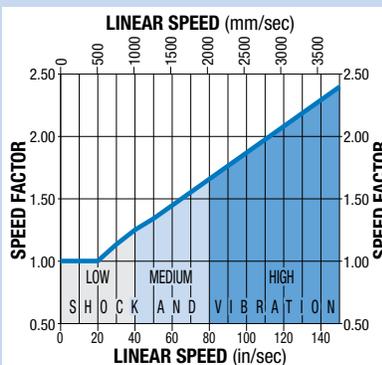

5 SELECT MOTOR (GEARHEAD IF NECESSARY) AND DRIVE

To help select a motor and drive, use the sizing equations located in the Engineering Resources section of the Tolomatic Electric Products Catalog (#3600-4609) to calculate the application thrust and torque requirements. Refer to Motor sections to determine the motor and drive.

6 DETERMINE MOUNTING PLATE REQUIREMENTS

- Consult the Mounting Plate Requirements graph for the model selected (page [MXB_11](#))
- Cross reference the application load and maximum distance between supports
- Select the appropriate number of mounting plates

7 CONSIDER OPTIONS

- Choose metric or inch (U.S. standard) load mounting. When ordering use **SIK** for inch and **SIM** for metric.
- Switches - Reed, Solid State PNP or NPN, all available normally open or normally closed

ACTUATOR



SIZING

USE THE TOLOMATIC SIZING AND SELECTION SOFTWARE AVAILABLE ON-LINE AT www.tolomatic.com OR... CALL TOLOMATIC AT 1-800-328-2174. We will provide any assistance needed to determine the proper MX actuator for the job.

MXB Rodless Belt Drive Actuators

SERVICE PARTS ORDERING

SWITCHES

Switches for MXB include retained mounting hardware and are the same for all actuator sizes and bearing styles

| Code | Part Number | Lead | Normally | Sensor Type |
|---|-------------|------------------|----------|-----------------|
|  | 8100-9082 | 5m (197 in) | Open | Reed |
|  | 8100-9083* | Quick-disconnect | | |
|  | 8100-9084 | 5m (197 in) | Closed | Reed |
|  | 8100-9085* | Quick-disconnect | | |
|  | 8100-9088 | 5m (197 in) | Open | Solid State PNP |
|  | 8100-9089* | Quick-disconnect | | |
|  | 8100-9090 | 5m (197 in) | Open | Solid State NPN |
|  | 8100-9091* | Quick-disconnect | | |
|  | 8100-9092 | 5m (197 in) | Closed | Solid State PNP |
|  | 8100-9093* | Quick-disconnect | | |
|  | 8100-9094 | 5m (197 in) | Closed | Solid State NPN |
|  | 8100-9095* | Quick-disconnect | | |

*Also order mating QD cable #8100-9080


| | | |
|---|-----------|---|
|  | 8100-9080 | Mating QD (Quick-disconnect) cable 197 in. (5m) |
|---|-----------|---|

⚠ NOTE: When ordering switches as service part, Magnet Housing Kit is required if actuator was not originally ordered with switches

OPTIONS

| ACTUATOR SIZE | Mounting Plate Kit | **MXB-U Magnet Housing Kit | **MXB-P Magnet Housing Kit |
|---------------|--------------------|----------------------------|----------------------------|
| 16 | 8316-9016 | 8516-9024 | 8340-1008 |
| 25 | 8525-9030 | 8525-9024 | 8525-9009 |
| 32 | 8532-9030 | 8525-9024 | 8532-9009 |
| 40 | 8340-9017 | 8525-9024 | 8540-9009 |
| 50 | 8350-9016 | 8550-9024 | 8550-9009 |
| 63 | 8363-9016 | 8550-9024 | 8563-9009 |

***Magnet Housing Kit is required if actuator was not originally ordered with switches

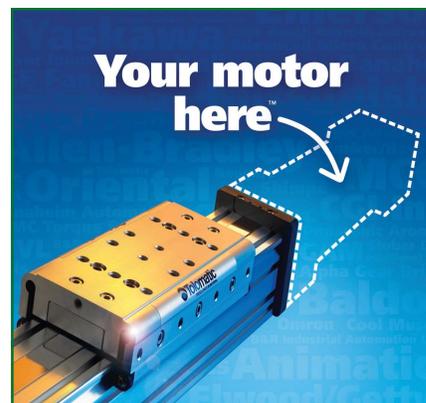

CUSTOM MOTOR MOUNTS. FIVE DAYS. NO CHARGE.

- Select a high-performance Tolomatic electric actuator and we'll provide a motor-specific interface for YOUR motor - at NO EXTRA CHARGE. With our online database, you can select from over 60 motor manufacturers and hundreds of models.

Visit www.tolomatic.com/ymh today to find your motor/actuator match!

OR

Select a complete system from tolomatic



- Motors • Drives • Controllers • Gearboxes

Tolomatic offers digital servo or stepper drives with motors matched to provide optimal performance with Tolomatic actuators.

CONFIGURE AN ACTUATOR AND A COMPLETE MOTION CONTROL SYSTEM TODAY USING TOLOMATIC'S EASY-TO-USE SIZING & SELECTION SOFTWARE

ACTUATOR



SIZING

Available **FREE** at www.tolomatic.com

MXB Rodless Belt Drive Actuators



ORDERING

MODEL SELECTION (MUST BE IN THIS ORDER)

MXB **40** **P** **BWS** **30** **SM** **200** **07** **02**

OPTIONS (IN ANY ORDER)

SDB **DC** **215** **9** **MP** **8** **HC** **2** **TK** **2**

MODEL
MXB MX Rodless Belt Drive Actuators

SERIES
16 Series actuator 40 Series actuator
25 Series actuator 50 Series actuator
32 Series actuator 63 Series actuator

BEARING
U Unguided Carrier
P Profiled Rail

BELT MATERIAL AND WIDTH
BWS10 10 mm Urethane Steel (MXB16)
BWS18 18 mm Urethane Steel (MXB25)
BWS25 25 mm Urethane Steel (MXB32)
BWS30 30 mm Urethane Steel (MXB40)
BWS40 40 mm Urethane Steel (MXB50)
BWS50 50 mm Urethane Steel (MXB63)

STROKE LENGTH & MOUNTING TYPE
SK _____ Stroke, enter desired stroke length in **inches**
SM _____ Stroke, enter desired stroke length in **millimeters**
GPB Blank Plate (MXB-U only)
NO MOUNTING HOLES allowing user to drill and tap as needed
NOTE: Actuator mounting threads and mounting fasteners will be either inch or metric, depending on how stroke length is indicated
SK=inch mounting
SM= metric mounting

MOTOR MOUNTING / REDUCTION
(must choose one)
SDL, SDLD* Direct Drive on Left
SDR, SDRD* Direct Drive on Right
▲ A motor size and code must be selected when specifying a 3:1 reduction. Reference the motor ordering pages in Electric Products Catalog #3600-4609.
SDTL, SDTLD* 3:1 Reduction on Top Left
SDTR, SDTRD* 3:1 Reduction on Top Right
SDBL, SDBLD* 3:1 Reduction on Left Bottom
SDBR, SDBRD* 3:1 Reduction on Right Bottom
***For Dual Stub Shaft Option**

MOTOR MOUNTING / REDUCTION
(must choose one)
SDT, SDTD* Direct Drive on Top
SDB, SDBD* Direct Drive on Bottom
▲ A motor size and code must be selected when specifying a 3:1 reduction. Reference the motor ordering pages in Electric Products Catalog #3600-4609.
SDLT, SDLTD* 3:1 Reduction on Left Top
SDRT, SDRTD* 3:1 Reduction on Right Top
SDLB, SDLBD* 3:1 Reduction on Left Bottom
SDRB, SDRBD* 3:1 Reduction on Right Bottom
***For Dual Stub Shaft Option**

AUXILIARY CARRIER
DC _____ Auxiliary Carrier, (MXB-P only) enter center-to-center spacing desired in **inches** (SK) or **millimeters** (SM)
(Same unit of measure as stroke length is required)
▲ Center-to-center spacing between carriers adds to overall length of the actuator, this distance will not be subtracted from stroke length specified in the previous step

HEAD COVER PLATES
HC2 Head Cover Plates

MOUNTING
MP_ Mounting Plates, & quantity
TC_ Tube Clamps, & quantity
NOTE: The MXB requires Mounting Plates to allow clearance for motor when mounted flush to surface. 16,25,32 sizes use T-Nuts with Mounting Plates. 40,50,63 sizes use Tube Clamps with Mounting Plates.

MOTOR / DRIVE / CONTROLLER / PLANETARY GEARBOX
▲ Reference the ordering pages in Electric Products Catalog #3600-4609 Stepper Products Brochure #3600-4160 & Planetary Gearbox Doc. #3600-4161

SWITCHES

| TYPE | LOGIC | NORMALLY | QUICK-DISCONNECT | CODE | QUANTITY | LEAD LENGTH |
|-------------|-------|----------|------------------|-----------|-----------------------------------|----------------------|
| REED | SPST | Open | no | RY | After code enter quantity desired | 5 meters (16.4 feet) |
| | | | QD | RK | | |
| SOLID STATE | PNP | Open | no | TY | | |
| | | | QD | TK | | |
| SOLID STATE | NPN | Open | no | KY | | |
| | | | QD | KK | | |
| SOLID STATE | PNP | Closed | no | PY | | |
| | | | QD | PK | | |
| SOLID STATE | NPN | Closed | no | HY | | |
| | | | QD | HK | | |

VISIT www.tolomatic.com/mxb
FOR COMPLETE, UP-TO-DATE INFORMATION

▲ Not all codes listed are compatible with all options.

Call Tolomatic 1-800-328-2174 to determine available options and accessories based on your application requirements.

THE TOLOMATIC DIFFERENCE What you expect from the industry leader:




EXCELLENT CUSTOMER SERVICE & TECHNICAL SUPPORT

Our people make the difference! Expect prompt, courteous replies to all of your application and product questions.



INDUSTRY LEADING DELIVERIES

Standard catalog products are built to order and ready-to-ship in 5 days or less. Modified and custom products ship weeks ahead of the competition.



INNOVATIVE PRODUCTS

From standard catalog products... to modified products... to completely unique custom products, Tolomatic designs and builds the best solutions for your challenging applications.



ONLINE SIZING & SELECTION SOFTWARE

Online sizing that is easy to use, accurate and always up-to-date. Input your application data and the software will determine a Tolomatic electric actuator to meet your requirements.



3D MODELS & 2D DRAWINGS AVAILABLE ON THE WEB

Easy to access CAD files are available in many popular formats.

ALSO CONSIDER THESE OTHER TOLOMATIC PRODUCTS:

PNEUMATIC PRODUCTS



RODLESS CYLINDERS: Band Cylinders, Cable Cylinders, MAGNETICALLY COUPLED CYLINDERS/SLIDES; GUIDED ROD CYLINDER SLIDES

"FOLDOUT" BROCHURE #9900-9075
PRODUCTS BROCHURE #9900-4028

ELECTRIC PRODUCTS



ROD & GUIDED ROD STYLE ACTUATORS, HIGH THRUST ACTUATORS, SCREW & BELT DRIVE RODLESS ACTUATORS, MOTORS, DRIVES AND CONTROLLERS

"FOLDOUT" BROCHURE #9900-9074
PRODUCTS BROCHURE #9900-4016

POWER TRANSMISSION PRODUCTS



GEARBOXES: Float-A-Shaft®, Slide-Rite®; DISC CONE CLUTCH; CALIPER DISC BRAKES

"FOLDOUT" BROCHURE #9900-9076
PRODUCTS BROCHURE #9900-4029



3800 County Road 116 • Hamel, MN 55340 U.S.A.
Phone: (763) 478-8000 • Fax: (763) 478-8080

Toll-Free: **1-800-328-2174**

Email: help@tolomatic.com • <http://www.tolomatic.com>

All brand and product names are trademarks or registered trademarks of their respective owners. Information in this document is believed accurate at time of printing. However, Tolomatic assumes no responsibility for its use or for any errors that may appear in this document. Tolomatic reserves the right to change the design or operation of the equipment described herein and any associated motion products without notice. Information in this document is subject to change without notice.

Visit www.tolomatic.com for the most up-to-date technical information

